

www.torindrive.com

搜索

获得更多信息 点击我们网站



销售微信公众号: TORINDRIVE



微信公众号: TORINDRIVECSC

苏州通润驱动设备股份有限公司
SUZHOU TORIN DRIVE EQUIPMENT CO., LTD.

地址: 江苏省常熟经济开发区高新技术产业园

Address: Changshu New & High Tech Industrial Park, CEDZ, Jiangsu, China

邮编 Post Code: 215500

电话 Tel: +86-512-52863917/52841532 (国内部)

+86-512-52841795/52840539 (国内部)

+86-512-52841592 (国际部 ForeignTrade Dept.)

传真 Fax: +86-512-52841915/52845918

网址 Website: www.torindrive.com




电子信箱 Email: hotline@torindrive.com

sales@torindrive.com

样本数据如有变动, 恕不另行通知。
Technical parameters may be subject to variations without notice.

GEARLESS^{CATALOG 2016}SERIES

PERMANENT MAGNET SYNCHRONOUS
GEARLESS TRACTION MACHINE



SUZHOU TORIN DRIVE EQUIPMENT CO., LTD.

ABOUT TORINDRIVE



Torin Drive, the specialized manufacturer of the elevator traction machines, the lift components and the other drive equipment, launched its production of elevator traction machines in 1985. Now, Torin Drive is the largest elevator traction machine manufacturer in the world. As Key High-tech Enterprise of State Torch Plan, we have world class factory with R&D test tower and the advanced equipment. Torin Drive aims at the diversified needs of clients and the various regional lift markets to develop the products in accordance with the diverse criterions, such as Asia Series, Europe Series, and North America Series, etc.

Each day, more than 700, 000 units of Torin Drive elevator traction machines are running simultaneously in the buildings throughout the globe. TORIN DRIVE strives for the most excellent elevator components production group with the intention of providing the personalized supporting and all-round service for the clients.

通润驱动是电梯曳引机、电梯部件产品及其他驱动设备产品的专业制造企业。我们潜心从事电梯曳引机生产始于1985年，充满能量的通润驱动已成长为全球最大的电梯曳引机制造基地。

作为“国家火炬计划重点高新技术企业”，我们拥有世界级的制造工厂，配备研发专设的试验塔及全线先进设备。通润驱动带着强大的电梯曳引机专研及生产能力，针对不同的电梯市场、按照全球各种电梯标准研发出适用于亚洲、欧洲、北美等市场的系列产品，满足更多国家及地区用户的需求。

每天超过700,000台来自通润驱动的电梯曳引机同时运行在全球建筑上，我将努力打造更为卓越的电梯部件集团, 为全球客户提供高品质产品的个性化配套与全方位服务。

Recommendation Form (GTW SERIES)

推荐表 (GTW 系列)

曳引比	Traction Ratio: 2:1	梯速 Lift Speed(m/s)					
额定载重	Load(kg)	1.0	1.5	1.6	1.75	2.0	2.5
320		GTW7					
450							
630		GTW7、GTW9、GTW2	GTW9、GTW2				
800							
1000		GTW9、GTW2、GTW10M					GTW10M
1150		GTW2、GTW3、GTW9、GTW10M			GTW2、GTW9、GTW10M		
1250		GTW3、GTW10M			GTW10M		
1350		GTW3、GTW5A、GTW10			GTW5A、GTW10		GTW10
1600		GTW5A、GTW10					
2000		GTW5A					

Our Standard Colours

本公司标准颜色


色号
CSY51

▶ 深灰色 (国际色RAL7005)
Dark Gray

色号
CSY50

▶ 蓝色 (国际色RAL5017)
Blue

CE A3—GTW7


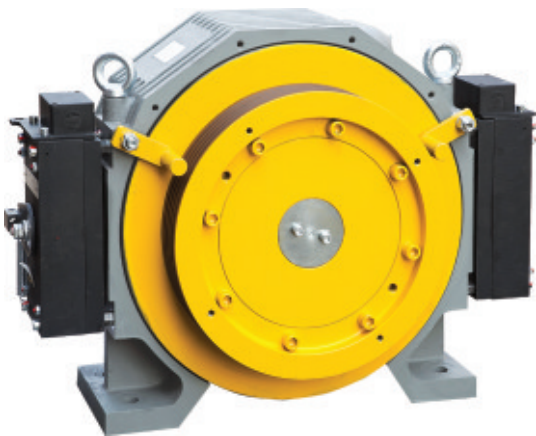


Elevator Traction Machine
电梯曳引机

电源电压	Voltage:380V
悬挂比	Suspension:2:1
FZD10制动器	Brake:DC110V 2*0.84A(2*1.1A)
自重	Weight:205kg
最大静态载荷	Max. Static Load:2000kg

规格号 Spec	载 重 Load (kg)	梯 速 Lift Speed (m/s)	推荐高度 Height (m)	曳引轮直径 Sheave Diam (mm)	绳 轮 Rope sheave (mm)	额定电流 Current (A)	额定转矩 Torque (Nm)	额定转速 Rated Speed (rpm)	额定频率 Frequency (Hz)	功 率 Power (kW)	极 数 Pole	工作制 Rating	绝缘等级 INS.Class	防护等级 IP Code
GTW7-31P0	320	1	≤80	Φ325	3×Φ8×12	5.8	200	118	19.6	2.5	20	S5(40%)	F	IP41
GTW7-31P5	320	1.5	≤80	Φ325	3×Φ8×12	9.2	200	177	29.5	3.7	20	S5(40%)	F	IP41
GTW7-31P6	320	1.6	≤80	Φ325	3×Φ8×12	9.2	200	189	31.5	4	20	S5(40%)	F	IP41
GTW7-31P7	320	1.75	≤80	Φ325	3×Φ8×12	9.9	200	206	34.3	4.3	20	S5(40%)	F	IP41
GTW7-41P0	450	1	≤80	Φ325	4×Φ8×12	7.9	265	118	19.6	3.3	20	S5(40%)	F	IP41
GTW7-41P5	450	1.5	≤80	Φ325	4×Φ8×12	12.2	265	177	29.5	4.9	20	S5(40%)	F	IP41
GTW7-41P6	450	1.6	≤80	Φ325	4×Φ8×12	12.2	265	189	31.5	5.3	20	S5(40%)	F	IP41
GTW7-41P7	450	1.75	≤80	Φ325	4×Φ8×12	13.1	265	206	34.3	5.7	20	S5(40%)	F	IP41
GTW7-50P6	550	0.63	≤80	Φ325	5×Φ8×12	6.4	290	74	12.3	2.3	20	S5(40%)	F	IP41
GTW7-50P7	550	0.75	≤80	Φ325	5×Φ8×12	9.3	290	88	14.6	2.7	20	S5(40%)	F	IP41
GTW7-51P0	550	1	≤80	Φ325	5×Φ8×12	9.3	290	118	19.6	3.6	20	S5(40%)	F	IP41
GTW7-60P6	630	0.63	≤80	Φ325	5×Φ8×12	7.1	322	74	12.3	2.5	20	S5(40%)	F	IP41
GTW7-60P7	630	0.75	≤80	Φ325	5×Φ8×12	10.3	322	88	14.6	3.0	20	S5(40%)	F	IP41
GTW7-61P0	630	1	≤80	Φ325	5×Φ8×12	10.3	322	118	19.6	4.0	20	S5(40%)	F	IP41

CE A3—GTW7

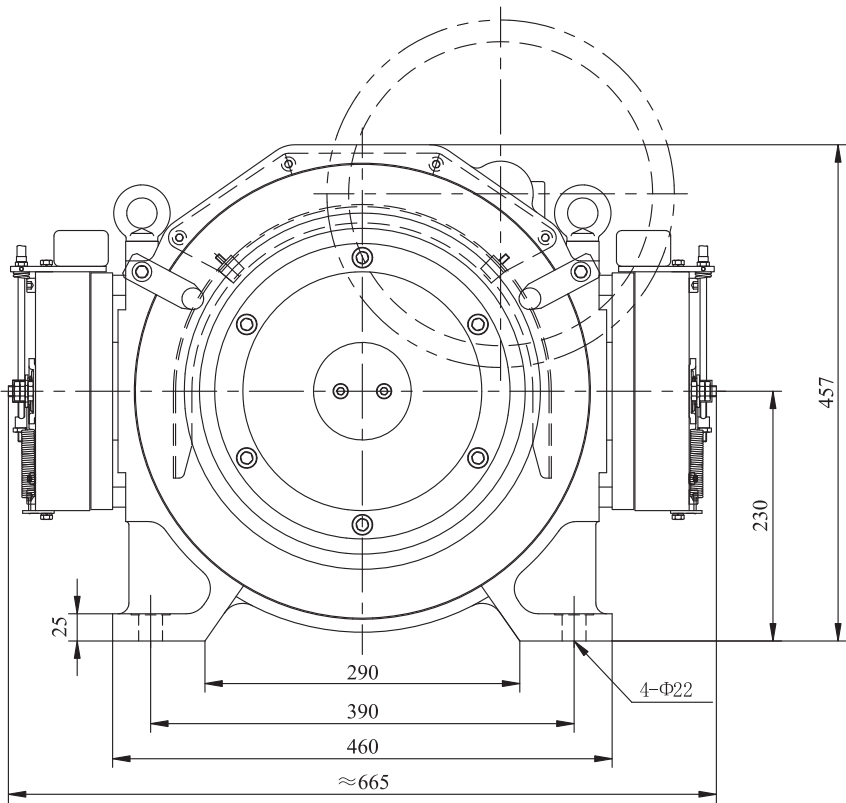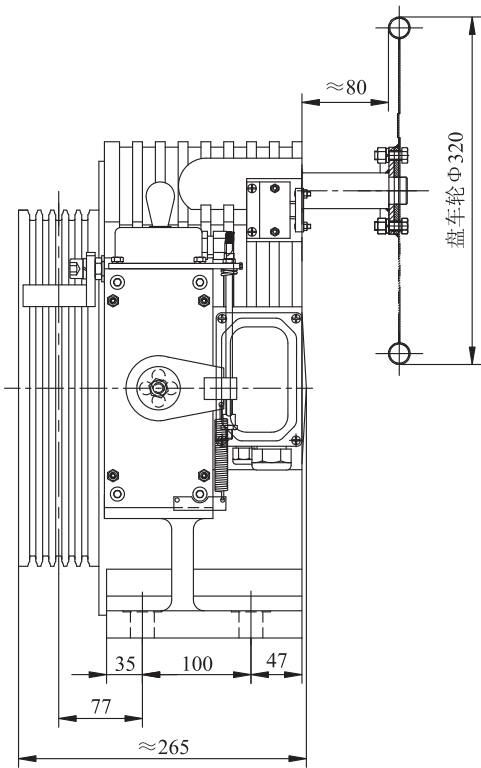

注

- 1. 本机型可配备盘车装置和4米长的远程手动松闸装置。
- 2. 当本机型用于额定载重为630kg时，电梯的平衡系统不应小于0.47。
- 3. 在本机型用于额定载重不大于450kg时，制动器电流为2*0.84A；当额定载重大于450kg时，制动器电流为2*1.1A。

Remark

The machine can be configured with the handwheel and the remote manual brake release which is 4m.
"When this machine is used for loading 630kg , the coefficient of elevator balance system shouldn't be less than 0.47."
"When this machine is used for loading ≤450kg, the current of brakes are 2*0.84A; when this machine is used for loading > 450kg, the current of brakes are 2*1.1A."

CE A3—GTW9





Elevator Traction Machine
电梯曳引机

电源电压	Voltage:380V
悬挂比	Suspension:2:1
FZD12A制动器	Brake:DC110V 2*0.88A
自重	Weight:350kg
最大静态载荷	Max. Static Load:3000kg

规格号 Spec	载 重 Load (kg)	梯 速 Lift Speed (m/s)	推荐高度 Height (m)	曳引轮直径 Sheave Diam (mm)	绳 轮 Rope sheave (mm)	额定电流 Current (A)	额定转矩 Torque (Nm)	额定转速 Rated Speed (rpm)	额定频率 Frequency (Hz)	功 率 Power (kW)	极 数 Pole	工作制 Rating	绝缘等级 INS.Class	防护等级 IP Code	长度L1 Length L1	长度L2 Length L2	长度L3 Length L3
GTW9-61P0	630	1.0	≤80	Φ400	4×Φ10×16	9.7	420	96	25.6	4.2	32	S5(40%)	F	IP41	84	293	307
GTW9-61P5	630	1.5	≤80	Φ400	4×Φ10×16	14.9	420	144	38.4	6.3	32	S5(40%)	F	IP41	84	293	307
GTW9-61P6	630	1.6	≤80	Φ400	4×Φ10×16	14.9	420	153	40.8	6.7	32	S5(40%)	F	IP41	84	293	307
GTW9-61P7	630	1.75	≤80	Φ400	4×Φ10×16	15.9	420	167	44.5	7.3	32	S5(40%)	F	IP41	84	293	307
GTW9-62P0	630	2.0	≤80	Φ400	4×Φ10×16	18.3	420	192	51.2	8.4	32	S5(40%)	F	IP41	84	293	307
GTW9-81P0	800	1.0	≤80	Φ400	5×Φ10×16	12.1	530	96	25.6	5.3	32	S5(40%)	F	IP41	84	293	307
GTW9-81P5	800	1.5	≤80	Φ400	5×Φ10×16	18.8	530	144	38.4	8	32	S5(40%)	F	IP41	84	293	307
GTW9-81P6	800	1.6	≤80	Φ400	5×Φ10×16	18.8	530	153	40.8	8.5	32	S5(40%)	F	IP41	84	293	307
GTW9-81P7	800	1.75	≤80	Φ400	5×Φ10×16	20.7	530	167	44.5	9.3	32	S5(40%)	F	IP41	84	293	307
GTW9-82P0	800	2.0	≤80	Φ400	5×Φ10×16	23.2	530	192	51.2	10.7	32	S5(40%)	F	IP41	84	293	307
GTW9-101P0	1000	1.0	≤80	Φ400	5×Φ10×16	14.6	650	96	25.6	6.5	32	S5(40%)	F	IP41	84	293	307
GTW9-101P5	1000	1.5	≤80	Φ400	5×Φ10×16	22.9	650	144	38.4	9.8	32	S5(40%)	F	IP41	84	293	307
GTW9-101P6	1000	1.6	≤80	Φ400	5×Φ10×16	22.9	650	153	40.8	10.4	32	S5(40%)	F	IP41	84	293	307
GTW9-101P7	1000	1.75	≤80	Φ400	5×Φ10×16	24.8	650	167	44.5	11.4	32	S5(40%)	F	IP41	84	293	307
GTW9-102P0	1000	2.0	≤80	Φ400	5×Φ10×16	27.7	650	192	51.2	13.1	32	S5(40%)	F	IP41	84	293	307
GTW9-111P0	1150	1.0	≤80	Φ340	8×Φ8×12	17.1	650	112	29.9	7.6	32	S5(40%)	F	IP41	92	309	323
GTW9-111P5	1150	1.5	≤80	Φ340	8×Φ8×12	26.2	650	168	44.8	11.4	32	S5(40%)	F	IP41	92	309	323
GTW9-111P6	1150	1.6	≤80	Φ340	8×Φ8×12	26.2	650	180	48.0	12.3	32	S5(40%)	F	IP41	92	309	323
GTW9-111P7	1150	1.75	≤80	Φ340	8×Φ8×12	28.9	650	198	52.8	13.5	32	S5(40%)	F	IP41	92	309	323
GTW9-112P0	1150	2.0	≤80	Φ340	8×Φ8×12	33	650	225	60.0	15.3	32	S5(40%)	F	IP41	92	309	323


CE A3—GTW9

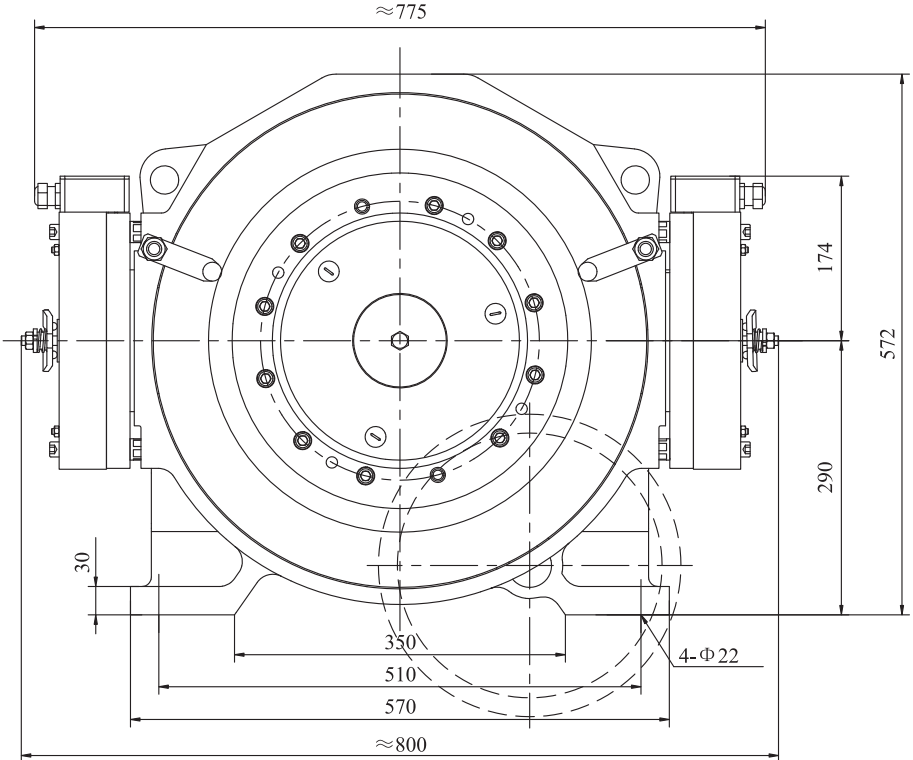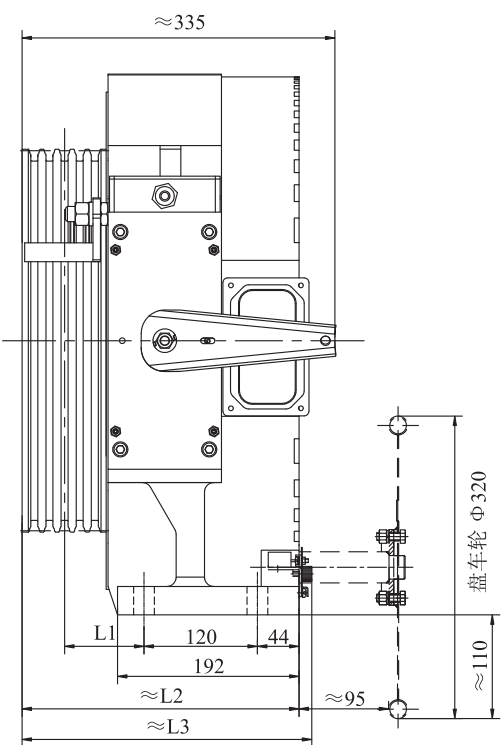

注
本机型可配备远程松闸装置并带4米松闸线。

Remark
The machine can be configured with the remote manual brake release with 4 meters wire.

CE A3 — GTW2

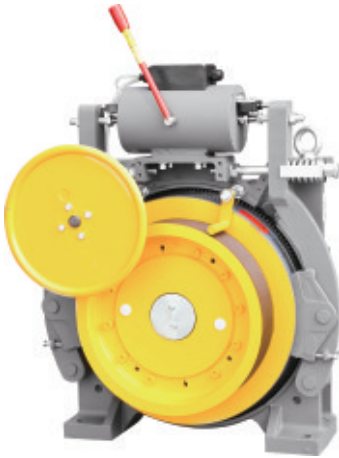


Elevator Traction Machine
电梯曳引机

电源电压	Voltage:380V
悬挂比	Suspension:2:1
DZE-14E制动器	Brake:DC110V 3.5A
自重	Weight:405kg
最大静态载荷	Max. Static Load:3000kg

规格号 Spec	载 重 Load (kg)	梯 速 Lift Speed (m/s)	推荐高度 Height (m)	曳引轮直径 Sheave Diam (mm)	绳 轮 Rope sheave (mm)	额定电流 Current (A)	额定转矩 Torque (Nm)	额定转速 Rated Speed (rpm)	额定频率 Frequency (Hz)	功 率 Power (kW)	极 数 Pole	工作制 Rating	绝缘等级 INS.Class	防护等级 IP Code	长度L1 Length L1	长度L2 Length L2
GTW2-61P0	630	1.0	≤80	φ400	4×φ10×16	10.6	450	96	16	4.5	20	S5(40%)	F	IP41	84	306
GTW2-61P5	630	1.5	≤80	φ400	4×φ10×16	16.5	450	144	24	6.8	20	S5(40%)	F	IP41	84	306
GTW2-61P6	630	1.6	≤80	φ400	4×φ10×16	16.5	450	153	25.5	7.2	20	S5(40%)	F	IP41	84	306
GTW2-61P7	630	1.75	≤80	φ400	4×φ10×16	18.0	450	167	27.8	7.9	20	S5(40%)	F	IP41	84	306
GTW2-62P0	630	2	≤80	φ400	4×φ10×16	20.3	450	192	32	9	20	S5(40%)	F	IP41	84	306
GTW2-81P0	800	1.0	≤80	φ400	5×φ10×16	12.8	550	96	16	5.5	20	S5(40%)	F	IP41	84	306
GTW2-81P5	800	1.5	≤80	φ400	5×φ10×16	20.8	550	144	24	8.3	20	S5(40%)	F	IP41	84	306
GTW2-81P6	800	1.6	≤80	φ400	5×φ10×16	20.8	550	153	25.5	8.8	20	S5(40%)	F	IP41	84	306
GTW2-81P7	800	1.75	≤80	φ400	5×φ10×16	21.8	550	167	27.8	9.6	20	S5(40%)	F	IP41	84	306
GTW2-82P0	800	2	≤80	φ400	5×φ10×16	24.9	550	192	32	11	20	S5(40%)	F	IP41	84	306
GTW2-101P0	1000	1.0	≤80	φ400	5×φ10×16	15.7	670	96	16	6.7	20	S5(40%)	F	IP41	84	306
GTW2-101P5	1000	1.5	≤80	φ400	5×φ10×16	25.2	670	144	24	10	20	S5(40%)	F	IP41	84	306
GTW2-101P6	1000	1.6	≤80	φ400	5×φ10×16	25.2	670	153	25.5	10.7	20	S5(40%)	F	IP41	84	306
GTW2-101P7	1000	1.75	≤80	φ400	5×φ10×16	26.7	670	167	27.8	11.7	20	S5(40%)	F	IP41	84	306
GTW2-102P0	1000	2	≤80	φ400	5×φ10×16	30.3	670	192	32	13.4	20	S5(40%)	F	IP41	84	306
GTW2-111P0	1150	1.0	≤80	φ340	8×φ8×12	17.7	670	112	18.7	7.9	20	S5(40%)	F	IP41	92	322
GTW2-111P5	1150	1.5	≤80	φ340	8×φ8×12	28.4	670	168	28	11.8	20	S5(40%)	F	IP41	92	322
GTW2-111P6	1150	1.6	≤80	φ340	8×φ8×12	28.4	670	180	30	12.6	20	S5(40%)	F	IP41	92	322
GTW2-111P7	1150	1.75	≤80	φ340	8×φ8×12	30.4	670	198	33	13.9	20	S5(40%)	F	IP41	92	322
GTW2-112P0	1150	2	≤80	φ340	8×φ8×12	35.7	670	225	37.5	15.8	20	S5(40%)	F	IP41	92	322


CE A3 — GTW2

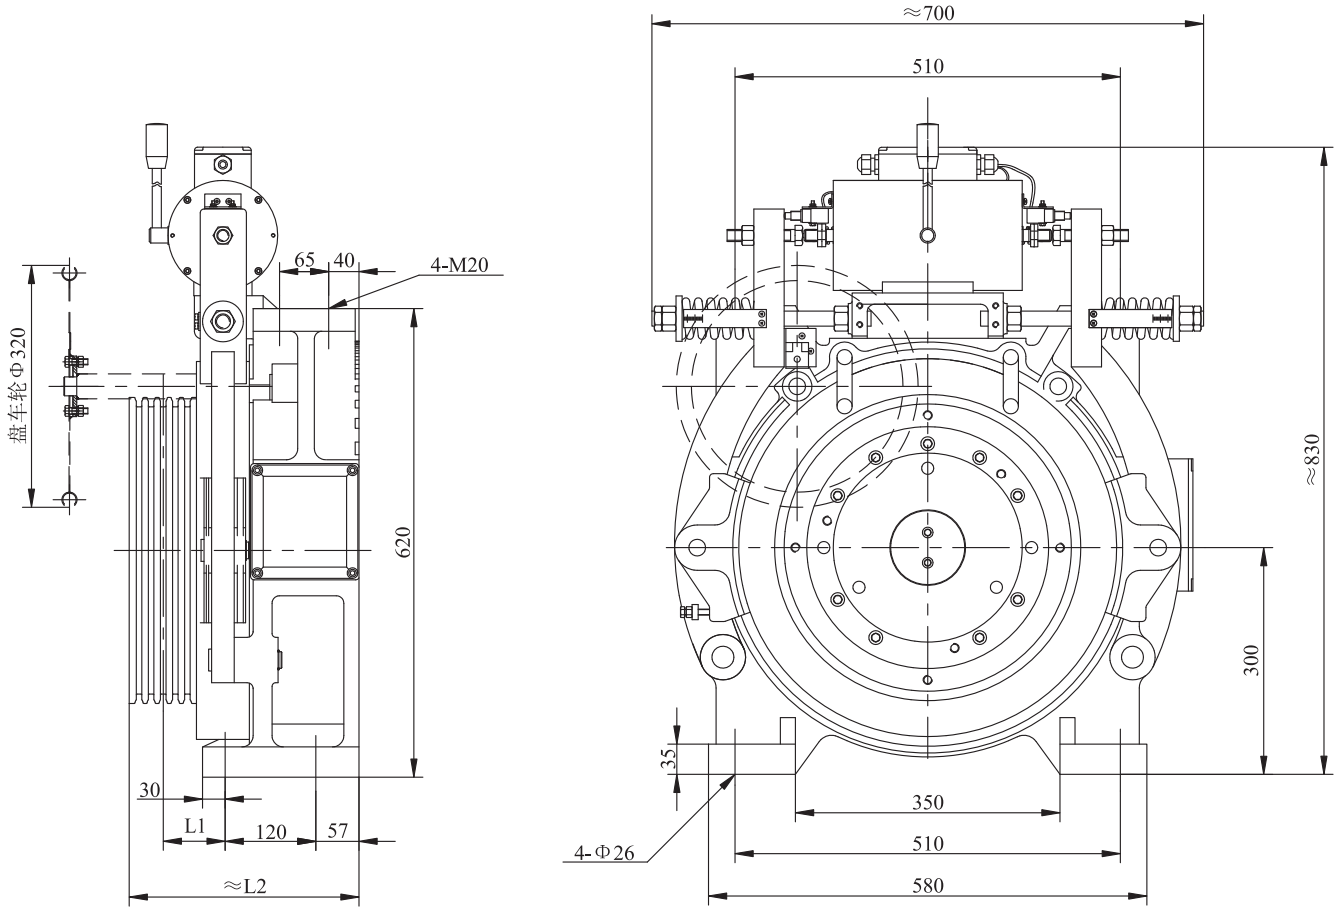

注
本机型可配备盘车装置和4米长的远程手动松闸装置。

Remark
The machine can be configured with the handwheel and the remote manual brake release which is 4m.

CE A3—GTW3

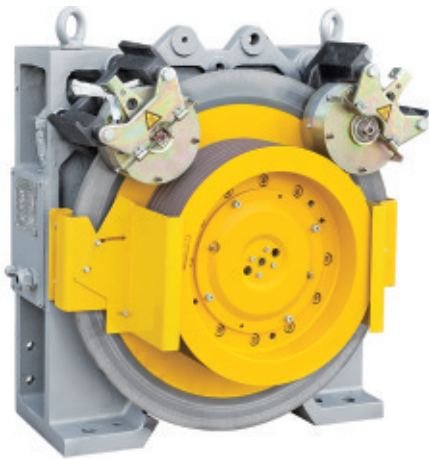


Elevator Traction Machine
电梯曳引机

电源电压	Voltage:380V
悬挂比	Suspension:2:1
PZD140制动器	Brake:DC110V 2*0.89A
自重	Weight: 530kg
最大静态载荷	Max. Static Load:4000kg

规格号 Spec	载 重 Load (kg)	梯 速 Lift Speed (m/s)	推荐高度 Height (m)	曳引轮直径 Sheave Diam (mm)	绳 轮 Rope sheave (mm)	额定电流 Current (A)	额定转矩 Torque (Nm)	额定转速 Rated Speed (rpm)	额定频率 Frequency (Hz)	功 率 Power (kW)	极 数 Pole	工作制 Rating	绝缘等级 INS.Class	防护等级 IP Code
GTW3-111P0	1150	1.0	≤80	Φ400	7×Φ10×16	19	780	96	16	7.8	20	S5(40%)	F	IP41
GTW3-111P5	1150	1.5	≤80	Φ400	7×Φ10×16	27.8	780	144	24	11.8	20	S5(40%)	F	IP41
GTW3-111P6	1150	1.6	≤80	Φ400	7×Φ10×16	27.8	780	153	25.5	12.5	20	S5(40%)	F	IP41
GTW3-111P7	1150	1.75	≤80	Φ400	7×Φ10×16	30.5	780	167	27.8	13.6	20	S5(40%)	F	IP41
GTW3-121P0	1250	1.0	≤80	Φ400	7×Φ10×16	20	870	96	16	8.7	20	S5(40%)	F	IP41
GTW3-121P5	1250	1.5	≤80	Φ400	7×Φ10×16	31.1	870	144	24	13.1	20	S5(40%)	F	IP41
GTW3-121P6	1250	1.6	≤80	Φ400	7×Φ10×16	31.1	870	153	25.5	13.9	20	S5(40%)	F	IP41
GTW3-121P7	1250	1.75	≤80	Φ400	7×Φ10×16	33.5	870	167	27.8	15.2	20	S5(40%)	F	IP41
GTW3-131P0	1350	1.0	≤80	Φ400	7×Φ10×16	21.8	945	96	16	9.5	20	S5(40%)	F	IP41
GTW3-131P5	1350	1.5	≤80	Φ400	7×Φ10×16	33.2	945	144	24	14.2	20	S5(40%)	F	IP41
GTW3-131P6	1350	1.6	≤80	Φ400	7×Φ10×16	33.2	945	153	25.5	15.1	20	S5(40%)	F	IP41
GTW3-131P7	1350	1.75	≤80	Φ400	7×Φ10×16	37.6	945	167	27.8	16.5	20	S5(40%)	F	IP41

CE A3—GTW3

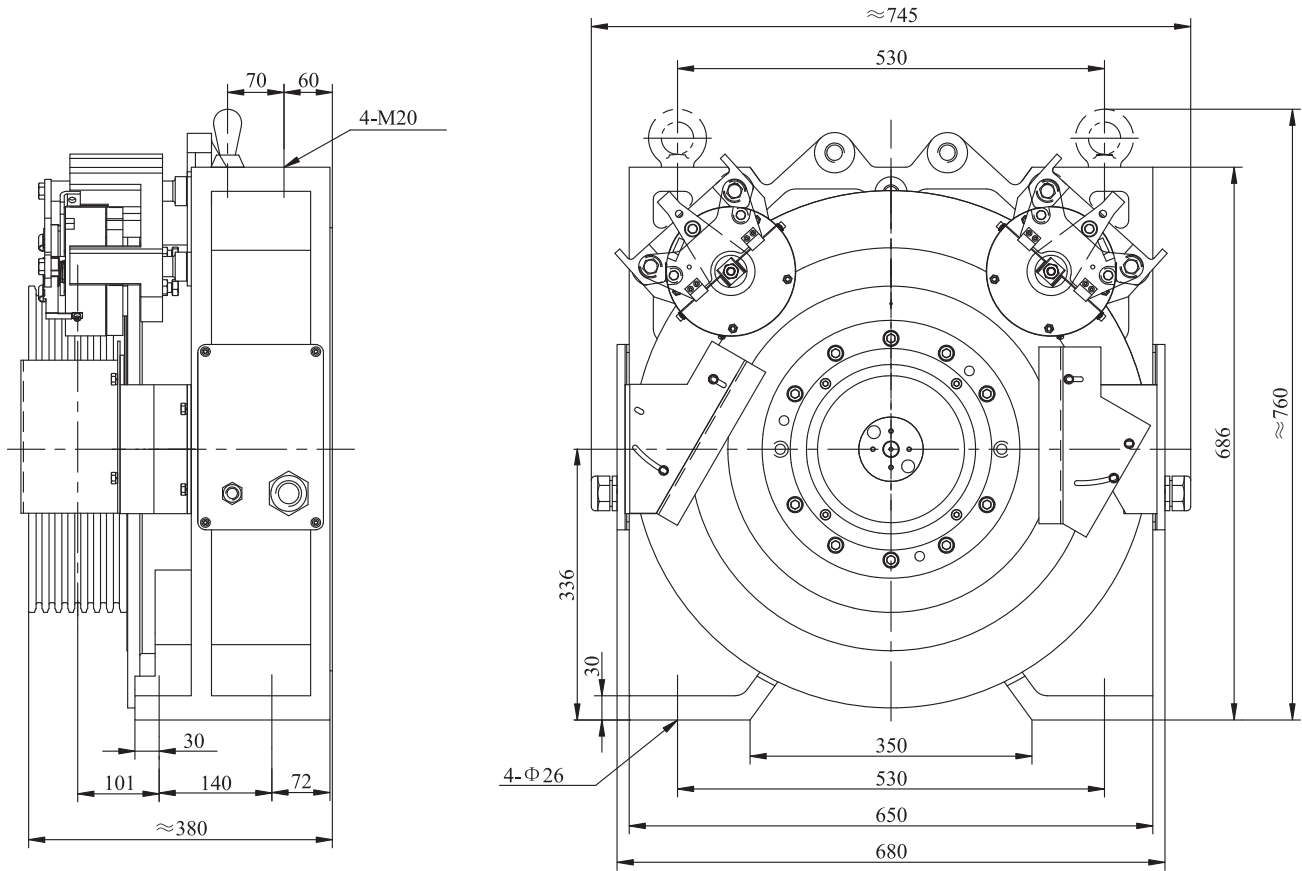

注

- 1. 本机型可配备远程松闸装置并带4米松闸线。
- 2. 本机型无盘车装置。

Remark

The machine can be configured with the remote manual brake release with 4 meters wire.
The machine can't be configured with the handwheel.

CE—GTW5A




Elevator Traction Machine
电梯曳引机

电源电压	Voltage:380V
悬挂比	Suspension:2:1
PZD220A制动器	Brake:DC110V 2*1.1A
自重	Weight:820kg
最大静态载荷	Max. Static Load:6000kg

规格号 Spec	载 重 Load (kg)	梯 速 Lift Speed (m/s)	推荐高度 Height (m)	曳引轮直径 Sheave Diam (mm)	绳 轮 Rope sheave (mm)	额定电流 Current (A)	额定转矩 Torque (Nm)	额定转速 Rated Speed (rpm)	额定频率 Frequency (Hz)	功 率 Power (kW)	极 数 Pole	工作制 Rating	绝缘等级 INS.Class	防护等级 IP Code
GTW5A-131P0	1350	1.0	≤80	Φ485	5×Φ12×18	24.3	1050	79	21	8.8	32	S5(40%)	F	IP41
GTW5A-131P6	1350	1.6	≤80	Φ485	5×Φ12×18	34.6	1050	126	33.6	14.2	32	S5(40%)	F	IP41
GTW5A-131P7	1350	1.75	≤80	Φ485	5×Φ12×18	37.4	1050	138	36.8	15.5	32	S5(40%)	F	IP41
GTW5A-132P0	1350	2.0	≤80	Φ485	5×Φ12×18	41.9	1050	158	42	17.6	32	S5(40%)	F	IP41
GTW5A-161P0	1600	1.0	≤80	Φ485	5×Φ12×18	27.4	1250	79	21	10.5	32	S5(40%)	F	IP41
GTW5A-161P6	1600	1.6	≤80	Φ485	5×Φ12×18	39.8	1250	126	33.6	16.5	32	S5(40%)	F	IP41
GTW5A-161P7	1600	1.75	≤80	Φ485	5×Φ12×18	44	1250	138	36.8	18.1	32	S5(40%)	F	IP41
GTW5A-162P0	1600	2.0	≤80	Φ485	5×Φ12×18	49.5	1250	158	42	20.7	32	S5(40%)	F	IP41
GTW5A-201P0	2000	1.0	≤80	Φ485	6×Φ12×18	31.7	1560	79	21	13	32	S5(40%)	F	IP41
GTW5A-201P6	2000	1.6	≤80	Φ485	6×Φ12×18	50	1560	126	33.6	20.7	32	S5(40%)	F	IP41
GTW5A-201P7	2000	1.75	≤80	Φ485	6×Φ12×18	53.8	1560	138	36.8	22.6	32	S5(40%)	F	IP41
GTW5A-202P0	2000	2.0	≤80	Φ485	6×Φ12×18	60.7	1560	158	42	26	32	S5(40%)	F	IP41

CE—GTW5A

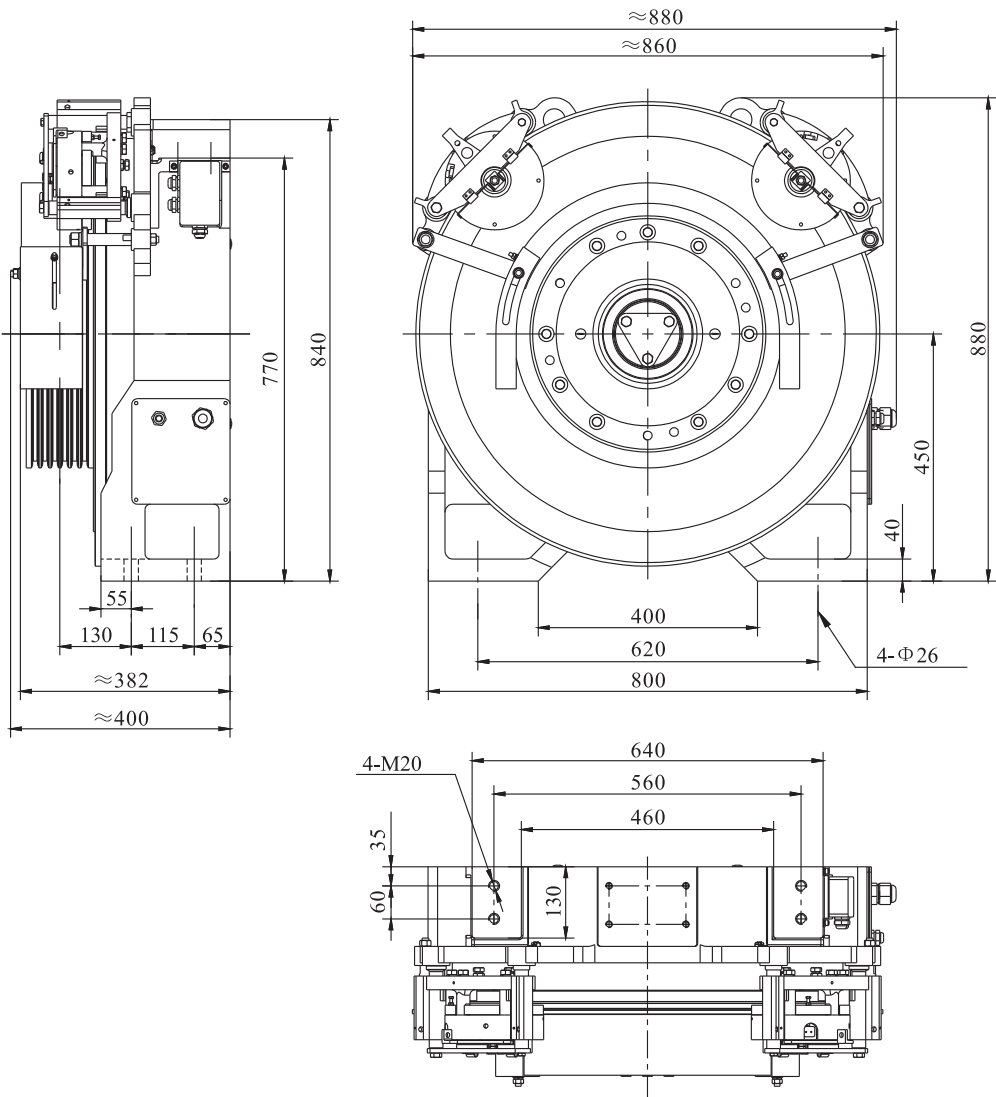

注


本机型可配备远程松闸装置并带4米松闸线。

Remark

The machine can be configured with the remote manual brake release with 4 meters wire.

GTW10M



Elevator Traction Machine 电梯曳引机

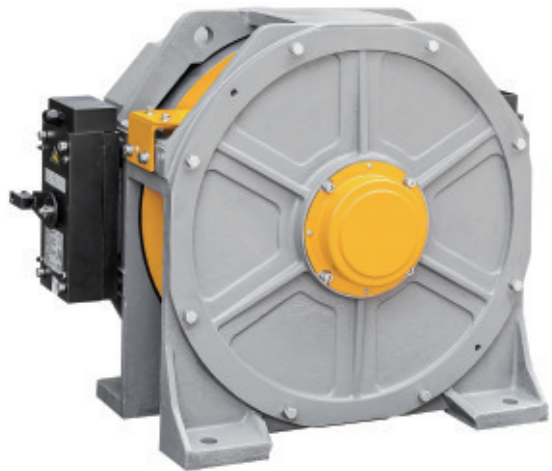

电源电压	Voltage:380V
悬挂比	Suspension:2:1
FZD12C制动器	Brake:DC110V 2*1.22A
自重	Weight:450kg
最大静态载荷	Max. Static Load:3500kg

规格号 Spec	载 重 Load (kg)	梯 速 Lift Speed (m/s)	推荐高度 Height (m)	曳引轮直径 Sheave Diam (mm)	绳 轮 Rope sheave (mm)	额定电流 Current (A)	额定转矩 Torque (Nm)	额定转速 Rated Speed (rpm)	额定频率 Frequency (Hz)	功 率 Power (kW)	极数	工作制	绝缘等级	防护等级
GTW10M-101P0	1000	1	≤120	Φ485	6×Φ10×16	13.9	750	79	21.1	6.2	32	S5(40%)	F	IP41
GTW10M-101P5	1000	1.5	≤120	Φ485	6×Φ10×16	20.7	750	118	31.5	9.3	32	S5(40%)	F	IP41
GTW10M-101P6	1000	1.6	≤120	Φ485	6×Φ10×16	20.7	750	126	33.6	9.9	32	S5(40%)	F	IP41
GTW10M-101P7	1000	1.75	≤120	Φ485	6×Φ10×16	22.9	750	138	36.8	10.8	32	S5(40%)	F	IP41
GTW10M-102P0	1000	2	≤120	Φ485	6×Φ10×16	26.2	750	158	42.1	12.4	32	S5(40%)	F	IP41
GTW10M-102P5	1000	2.5	≤120	Φ485	6×Φ10×16	32.4	750	197	52.5	15.5	32	S5(40%)	F	IP41
GTW10M-111P0	1150	1	≤120	Φ485	6×Φ10×16	15.8	860	79	21.1	7.1	32	S5(40%)	F	IP41
GTW10M-111P5	1150	1.5	≤120	Φ485	6×Φ10×16	23.9	860	118	31.5	10.6	32	S5(40%)	F	IP41
GTW10M-111P6	1150	1.6	≤120	Φ485	6×Φ10×16	23.9	860	126	33.6	11.3	32	S5(40%)	F	IP41
GTW10M-111P7	1150	1.75	≤120	Φ485	6×Φ10×16	26.0	860	138	36.8	12.4	32	S5(40%)	F	IP41
GTW10M-112P0	1150	2	≤120	Φ485	6×Φ10×16	29.5	860	158	42.1	14.2	32	S5(40%)	F	IP41
GTW10M-112P5	1150	2.5	≤120	Φ485	6×Φ10×16	37.0	860	197	52.5	17.7	32	S5(40%)	F	IP41
GTW10M-121P0	1250	1	≤120	Φ485	6×Φ10×16	17.9	990	79	21.1	8.2	32	S5(40%)	F	IP41
GTW10M-121P5	1250	1.5	≤120	Φ485	6×Φ10×16	27.7	990	118	31.5	12.2	32	S5(40%)	F	IP41
GTW10M-121P6	1250	1.6	≤120	Φ485	6×Φ10×16	27.7	990	126	33.6	13.1	32	S5(40%)	F	IP41
GTW10M-121P7	1250	1.75	≤120	Φ485	6×Φ10×16	30.0	990	138	36.8	14.3	32	S5(40%)	F	IP41
GTW10M-122P0	1250	2	≤120	Φ485	6×Φ10×16	34.7	990	158	42.1	16.4	32	S5(40%)	F	IP41
GTW10M-122P5	1250	2.5	≤120	Φ485	6×Φ10×16	42.9	990	197	52.5	20.4	32	S5(40%)	F	IP41

GTW10M

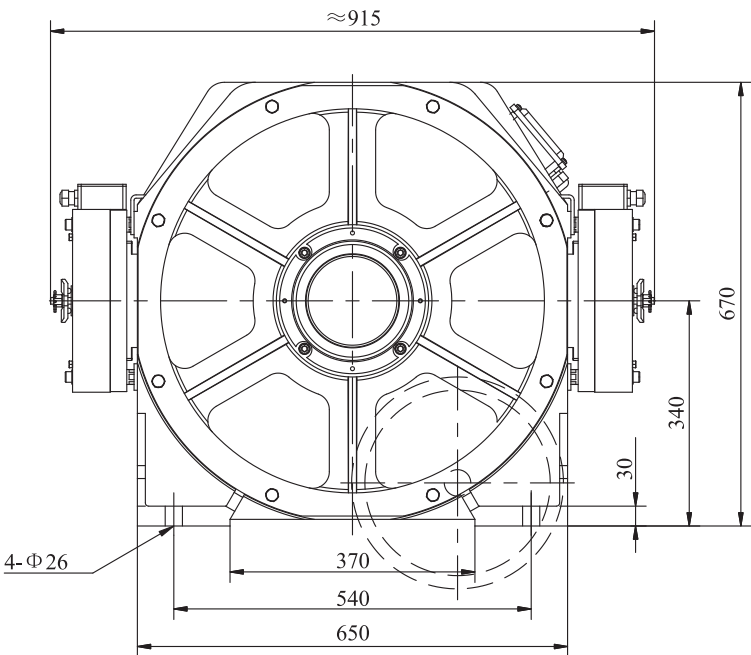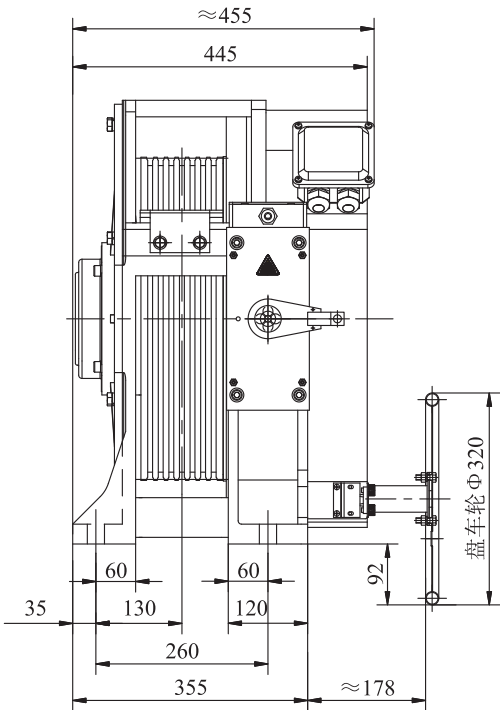

注


本机型可配备远程松闸装置并带4米松闸线。

Remark

The machine can be configured with the remote manual brake release with 4 meters wire.

GTW10



Elevator Traction Machine 电梯曳引机

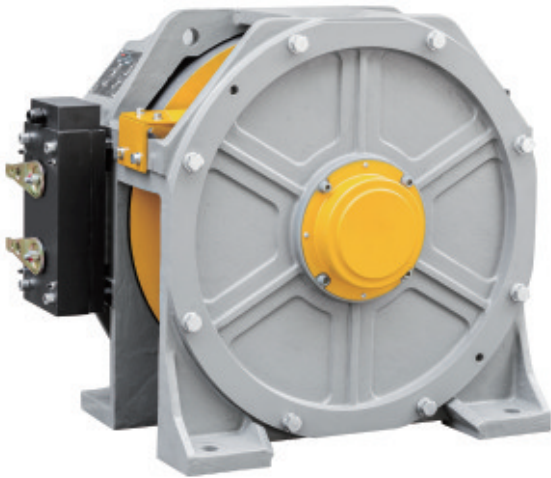

电源电压	Voltage:380V
悬挂比	Suspension:2:1
FZD14制动器	Brake:DC110V 2*2A
自重	Weight:550kg
最大静态载荷	Max. Static Load:5500kg

规格号 Spec	载 重 Load (kg)	梯 速 Lift Speed (m/s)	推荐高度 Height (m)	曳引轮直径 Sheave Diam (mm)	绳 轮 Rope sheave (mm)	额定电流 Current (A)	额定转矩 Torque (Nm)	额定转速 Rated Speed (rpm)	额定频率 Frequency (Hz)	功 率 Power (kW)	极 数 Pole	工作制 Rating	绝缘等级 INS.Class	防护等级 IP Code
GTW10-131P0	1350	1	≤120	Φ485	8×Φ10×16	19.3	1070	79	21.1	8.9	32	S5(40%)	F	IP41
GTW10-131P5	1350	1.5	≤120	Φ485	8×Φ10×16	29.5	1070	118	31.5	13.2	32	S5(40%)	F	IP41
GTW10-131P6	1350	1.6	≤120	Φ485	8×Φ10×16	29.5	1070	126	33.6	14.1	32	S5(40%)	F	IP41
GTW10-131P7	1350	1.75	≤120	Φ485	8×Φ10×16	32.2	1070	138	36.8	15.5	32	S5(40%)	F	IP41
GTW10-132P0	1350	2	≤120	Φ485	8×Φ10×16	37.0	1070	158	42.1	17.7	32	S5(40%)	F	IP41
GTW10-132P5	1350	2.5	≤120	Φ485	8×Φ10×16	45.8	1070	197	52.5	22.1	32	S5(40%)	F	IP41
GTW10-161P0	1600	1	≤120	Φ485	8×Φ10×16	22.8	1270	79	21.1	10.5	32	S5(40%)	F	IP41
GTW10-161P5	1600	1.5	≤120	Φ485	8×Φ10×16	35.6	1270	118	31.5	15.7	32	S5(40%)	F	IP41
GTW10-161P6	1600	1.6	≤120	Φ485	8×Φ10×16	35.6	1270	126	33.6	16.8	32	S5(40%)	F	IP41
GTW10-161P7	1600	1.75	≤120	Φ485	8×Φ10×16	38.7	1270	138	36.8	18.4	32	S5(40%)	F	IP41
GTW10-162P0	1600	2	≤120	Φ485	8×Φ10×16	44.5	1270	158	42.1	21.0	32	S5(40%)	F	IP41
GTW10-162P5	1600	2.5	≤120	Φ485	8×Φ10×16	55.7	1270	197	52.5	26.2	32	S5(40%)	F	IP41

GTW10

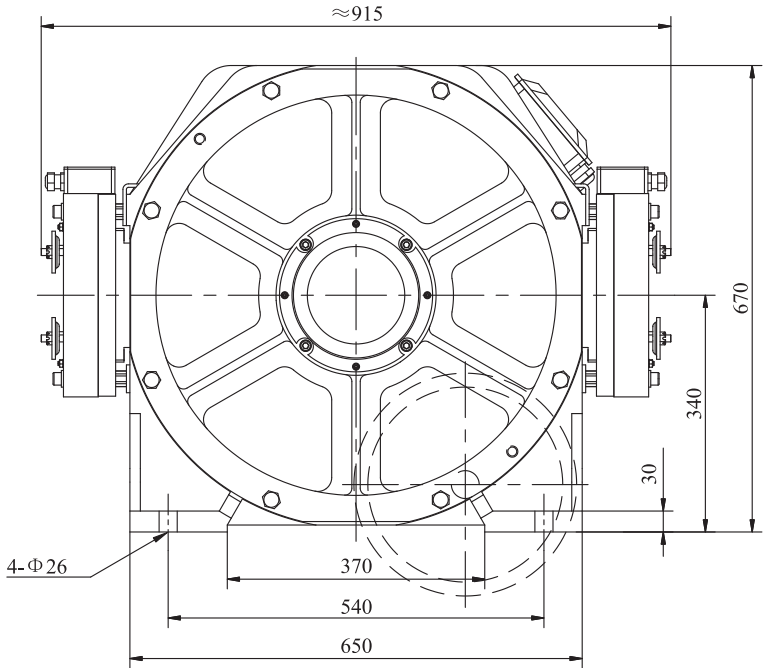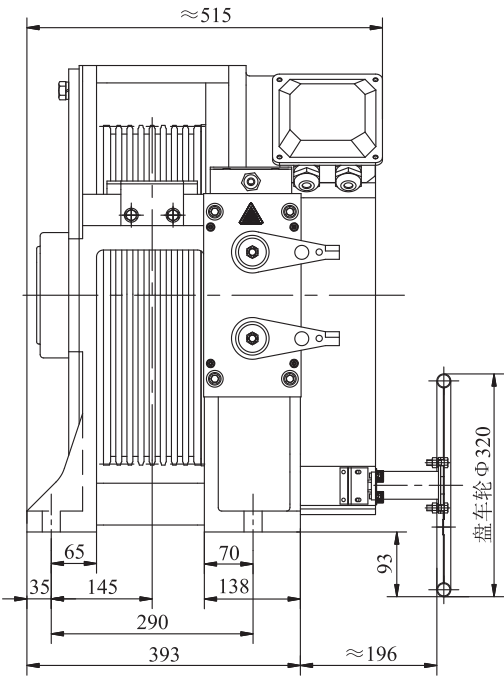

注

本机型可配备远程松闸装置并带4米松闸线。

Remark

The machine can be configured with the remote manual brake release with 4 meters wire.

ER

SERIES

PERMANENT MAGNET SYNCHRONOUS
GEARLESS TRACTION MACHINE


Recommendation Form (ER SERIES)

推荐表 (ER 系列)

曳引比	Traction Ratio: 2:1	梯速 Lift Speed(m/s)				
额定载重	Load(kg)	1.0	1.5	1.6	1.75	2.0
320		ERS(Φ320)、ERSC(Φ240)				
450						
630		ERS(Φ240)、ER1(Φ320)				
800		ER1(Φ240)、ER2D(Φ320)				
1000						
1150		ER3D(Φ320)、ER6D(Φ440)				ER6D(Φ440)
1250						
1350		ER3(Φ320)、ER6D(Φ440)				ER6D(Φ440)
1600						
2250		ER6D(Φ440)				

CE A3—ERSC


Elevator Traction Machine
电梯曳引机

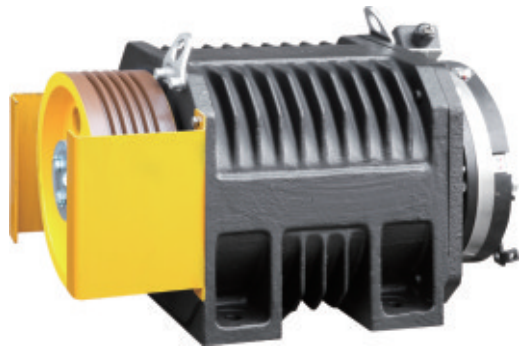

电源电压	Voltage:380V
悬挂比	Suspension:2:1
PZ300B 制动器	Brake:DC110V 1.6A
自重	Weight:140kg
最大静态载荷	Max. Static Load:1600kg

规格号 Spec	载 重 Load (kg)	梯 速 Lift Speed (m/s)	推荐高度 Height (m)	曳引轮直径 Sheave Diam (mm)	绳 轮 Rope sheave (mm)	额定电流 Current (A)	额定转矩 Torque (Nm)	额定转速 Rated Speed (rpm)	额定频率 Frequency (Hz)	功 率 Power (kW)	极 数 Pole	工作制 Rating	绝缘等级 INS.Class	防护等级 IP Code
ERSC-31P0B	320	1	≤80	Φ240	4×Φ6.5×12	5.4	125	159	26.5	2.1	20	S5(40%)	F	IP41
ERSC-31P5B	320	1.5	≤80	Φ240	4×Φ6.5×12	8	125	239	39.8	3.1	20	S5(40%)	F	IP41
ERSC-31P6B	320	1.6	≤80	Φ240	4×Φ6.5×12	8	125	255	42.5	3.3	20	S5(40%)	F	IP41
ERSC-31P7B	320	1.75	≤80	Φ240	4×Φ6.5×12	8.6	125	279	46.5	3.7	20	S5(40%)	F	IP41
ERSC-41P0B	450	1	≤80	Φ240	5×Φ6.5×12	8.6	175	159	26.5	3	20	S5(40%)	F	IP41
ERSC-41P5B	450	1.5	≤80	Φ240	5×Φ6.5×12	10.9	175	239	39.8	4.5	20	S5(40%)	F	IP41
ERSC-41P6B	450	1.6	≤80	Φ240	5×Φ6.5×12	10.9	175	255	42.5	4.7	20	S5(40%)	F	IP41
ERSC-41P7B	450	1.75	≤80	Φ240	5×Φ6.5×12	12	175	279	46.5	5.1	20	S5(40%)	F	IP41

CE A3—ERSC

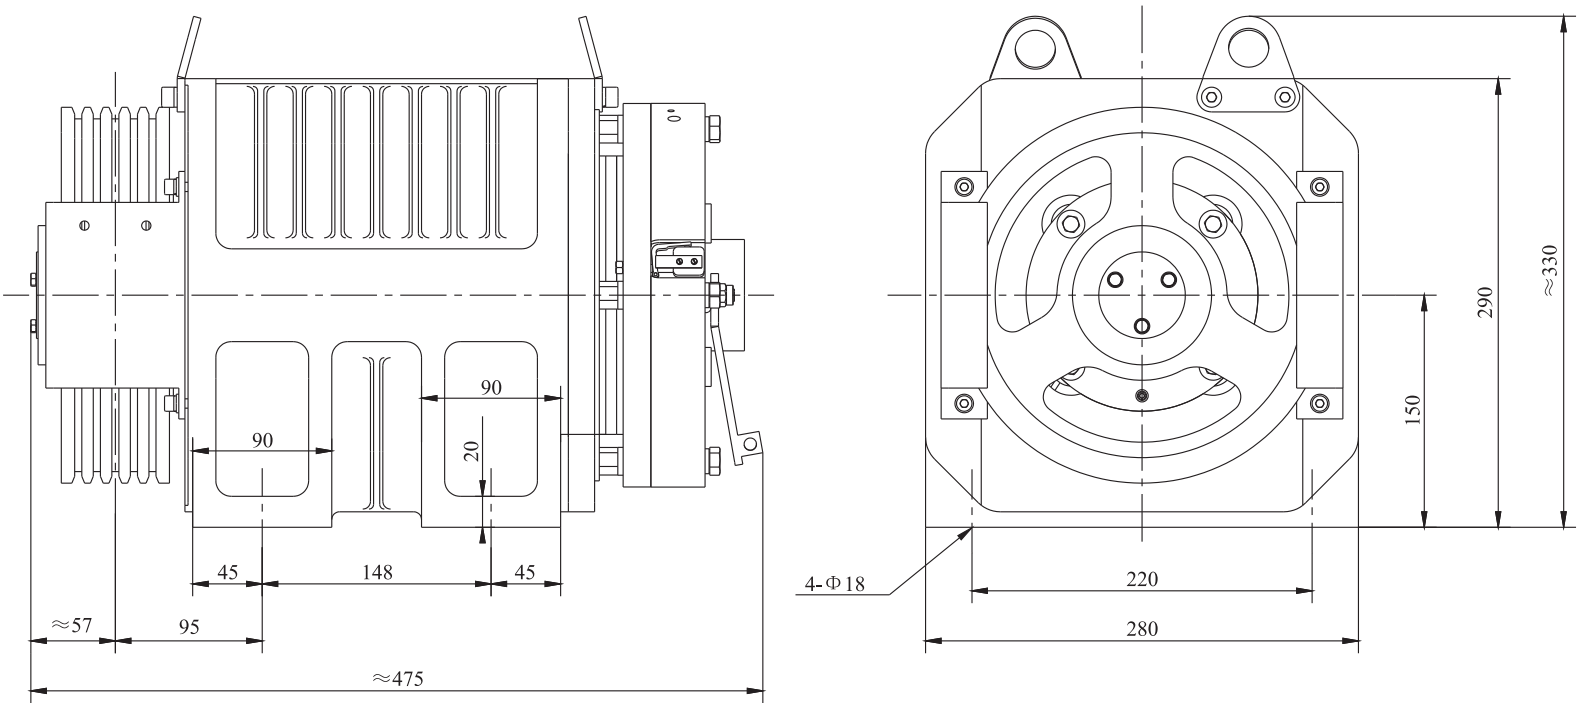


注
本机型可配备远程松闸装置并带4米松闸线。

Remark
The machine can be configured with the remote manual brake release with 4 meters wire.



CE A3—ERS


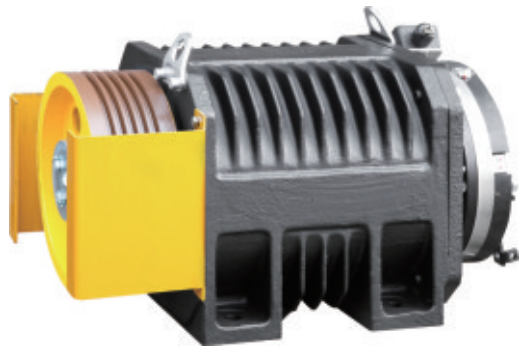


Elevator Traction Machine
电梯曳引机

电源电压	Voltage:380V
悬挂比	Suspension:2:1
PZ300C 制动器	Brake:DC110V 1.9A
自重	Weight:160kg
最大静态载荷	Max. Static Load:1800kg

规格号 Spec	载 重 Load (kg)	梯 速 Lift Speed (m/s)	推荐高度 Height (m)	曳引轮直径 Sheave Diam (mm)	绳 轮 Rope sheave (mm)	额定电流 Current (A)	额定转矩 Torque (Nm)	额定转速 Rated Speed (rpm)	额定频率 Frequency (Hz)	功 率 Power (kW)	极 数 Pole	工作制 Rating	绝缘等级 INS.Class	防护等级 IP Code
ERS-61P0B	630	1	≤80	Φ240	7×Φ6.5×12	10.7	230	159	26.5	4	20	S5(40%)	F	IP41
ERS-61P5B	630	1.5	≤80	Φ240	7×Φ6.5×12	15.3	230	239	39.8	6	20	S5(40%)	F	IP41
ERS-61P6B	630	1.6	≤80	Φ240	7×Φ6.5×12	15.3	230	255	42.5	6.4	20	S5(40%)	F	IP41
ERS-61P7B	630	1.75	≤80	Φ240	7×Φ6.5×12	16.5	230	279	46.5	7	20	S5(40%)	F	IP41

CE A3—ERS

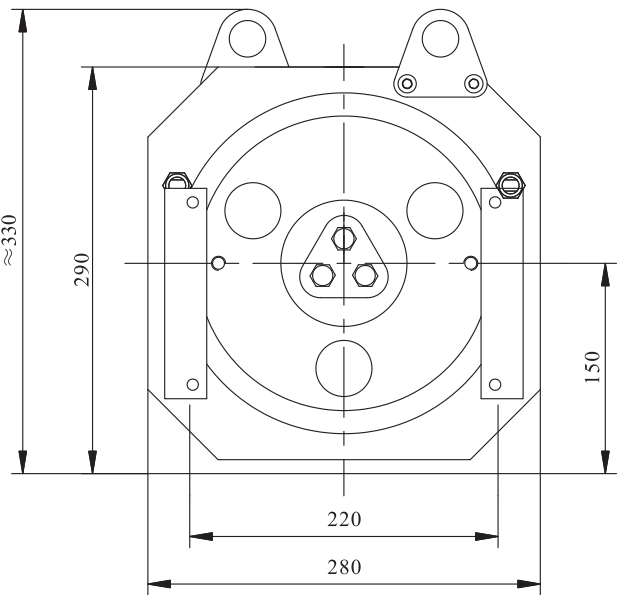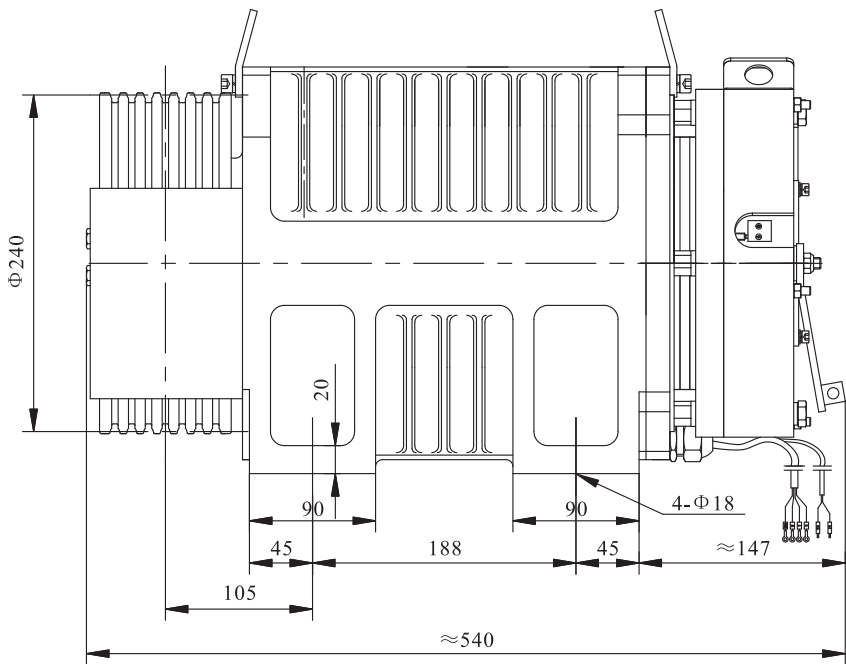

注


1.本机型可配备远程松闸装置并带4米松闸线。

Remark

The machine can be configured with the remote manual brake release with 4 meters wire.



CE A3—ERS

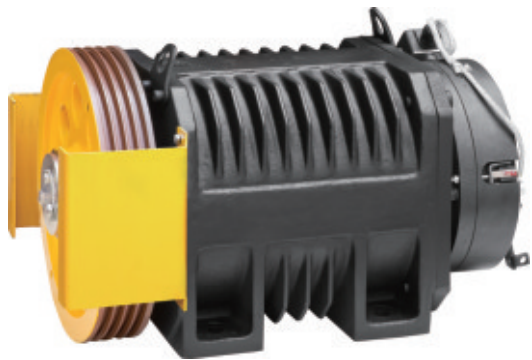


Elevator Traction Machine
电梯曳引机

电源电压	Voltage:380V
悬挂比	Suspension:2:1
PZ300C(PZ300B) 制动器	Brake:DC110V 1.9A(1.6A)
自重	Weight:190kg
最大静态载荷	Max. Static Load:1800kg

规格号 Spec	载重 Load (kg)	梯速 Lift Speed (m/s)	推荐高度 Height (m)	曳引轮直径 Sheave Diam (mm)	绳轮 Rope sheave (mm)	额定电流 Current (A)	额定转矩 Torque (Nm)	额定转速 Rated Speed (rpm)	额定频率 Frequency (Hz)	功率 Power (kW)	极数 Pole	工作制 Rating	绝缘等级 INS.Class	防护等级 IP Code	长度L1 Length L1	长度L Length L
ERS-31P0C 320	320	1	≤80	Φ320	3×Φ8×12	6.2	175	120	20	2.2	20	S5(40%)	F	IP41	132	525
ERS-31P5C 320	320	1.5	≤80	Φ320	3×Φ8×12	8.5	175	179	29.8	3.3	20	S5(40%)	F	IP41	132	525
ERS-31P6C 320	320	1.6	≤80	Φ320	3×Φ8×12	8.5	175	192	32	3.5	20	S5(40%)	F	IP41	132	525
ERS-31P7C 320	320	1.75	≤80	Φ320	3×Φ8×12	9.2	175	209	34.8	3.8	20	S5(40%)	F	IP41	132	525
ERS-41P0C 450	450	1	≤80	Φ320	4×Φ8×12	8.4	240	120	20	3	20	S5(40%)	F	IP41	147	540
ERS-41P5C 450	450	1.5	≤80	Φ320	4×Φ8×12	11.6	240	179	29.8	4.5	20	S5(40%)	F	IP41	147	540
ERS-41P6C 450	450	1.6	≤80	Φ320	4×Φ8×12	11.6	240	192	32	4.8	20	S5(40%)	F	IP41	147	540
ERS-41P7C 450	450	1.75	≤80	Φ320	4×Φ8×12	12.5	240	209	34.8	5.3	20	S5(40%)	F	IP41	147	540

CE A3—ERS

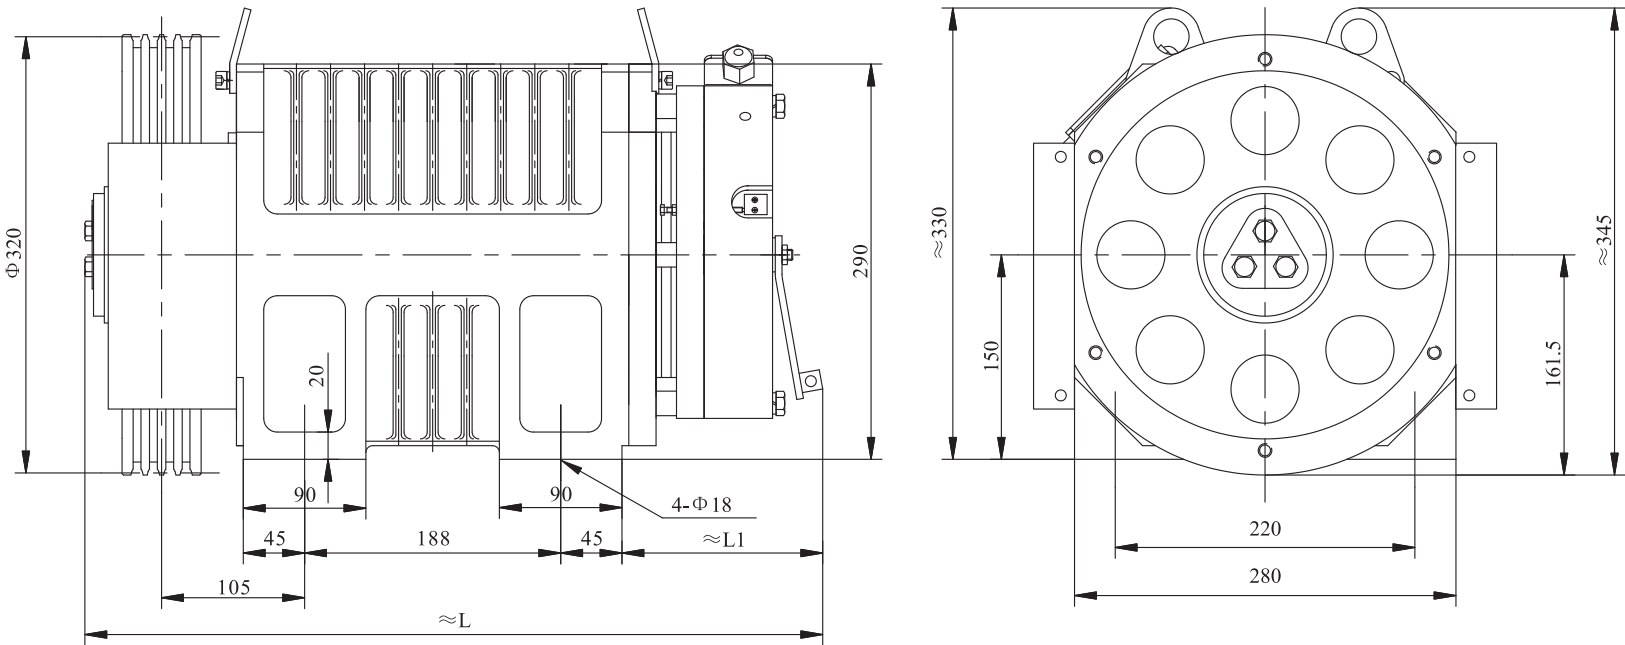

注

- 1.本机型可配备远程松闸装置并带4米松闸线。
- 2.额定载重为320kg的曳引机配置PZ300B制动器，额定载重为450kg的曳引机配置PZ300C制动器。

Remark

The machine can be configured with the remote manual brake release with 4 meters wire.

Traction machine with load 320kg is configured with brake PZ300B, and traction machine with load 450kg is configured with brake PZ300C.

CE  A3 — ER1




Elevator Traction Machine
电梯曳引机

电源电压	Voltage:380V
悬挂比	Suspension:2:1
SPZ300制动器	Brake:DC110V 2*1.0A
自重	Weight: 230kg
最大静态载荷	Max. Static Load:2200kg

规格号 Spec	载重 Load (kg)	梯速 Lift Speed (m/s)	推荐高度 Height (m)	曳引轮直径 Sheave Diam (mm)	绳轮 Rope sheave (mm)	额定电流 Current (A)	额定转矩 Torque (Nm)	额定转速 Rated Speed (rpm)	额定频率 Frequency (Hz)	功率 Power (kW)	极数 Pole	工作制 Rating	绝缘等级 INS.Class	防护等级 IP Code	长度L1 Length L1	长度L Length L
ER1-61P0B	630	1	≤80	Φ320	5×Φ8×12	11.8	360	119	19.9	4.5	20	S5(40%)	F	IP41	110	610
ER1-61P5B	630	1.5	≤80	Φ320	5×Φ8×12	17.8	360	179	29.8	6.7	20	S5(40%)	F	IP41	110	610
ER1-61P6B	630	1.6	≤80	Φ320	5×Φ8×12	17.8	360	192	32	7.2	20	S5(40%)	F	IP41	110	610
ER1-61P7B	630	1.75	≤80	Φ320	5×Φ8×12	19.1	360	209	34.8	7.9	20	S5(40%)	F	IP41	110	610
ER1-81P0B	800	1	≤80	Φ240	8×Φ6.5×12	13.5	310	159	26.5	5.2	20	S5(40%)	F	IP41	133	650
ER1-81P5B	800	1.5	≤80	Φ240	8×Φ6.5×12	20	310	239	39.8	7.8	20	S5(40%)	F	IP41	133	650
ER1-81P6B	800	1.6	≤80	Φ240	8×Φ6.5×12	20	310	255	42.5	8.3	20	S5(40%)	F	IP41	133	650
ER1-81P7B	800	1.75	≤80	Φ240	8×Φ6.5×12	21.5	310	279	46.5	9.1	20	S5(40%)	F	IP41	133	650
ER1-101P0B	1000	1	≤80	Φ240	9/10×Φ6.5×12	16.6	380	159	26.5	6.3	20	S5(40%)	F	IP41	133	650
ER1-101P5B	1000	1.5	≤80	Φ240	9/10×Φ6.5×12	24.5	380	239	39.8	9.5	20	S5(40%)	F	IP41	133	650
ER1-101P6B	1000	1.6	≤80	Φ240	9/10×Φ6.5×12	24.5	380	255	42.5	10.2	20	S5(40%)	F	IP41	133	650
ER1-101P7B	1000	1.75	≤80	Φ240	9/10×Φ6.5×12	26.3	380	279	46.5	11.1	20	S5(40%)	F	IP41	133	650

CE  A3 — ER1

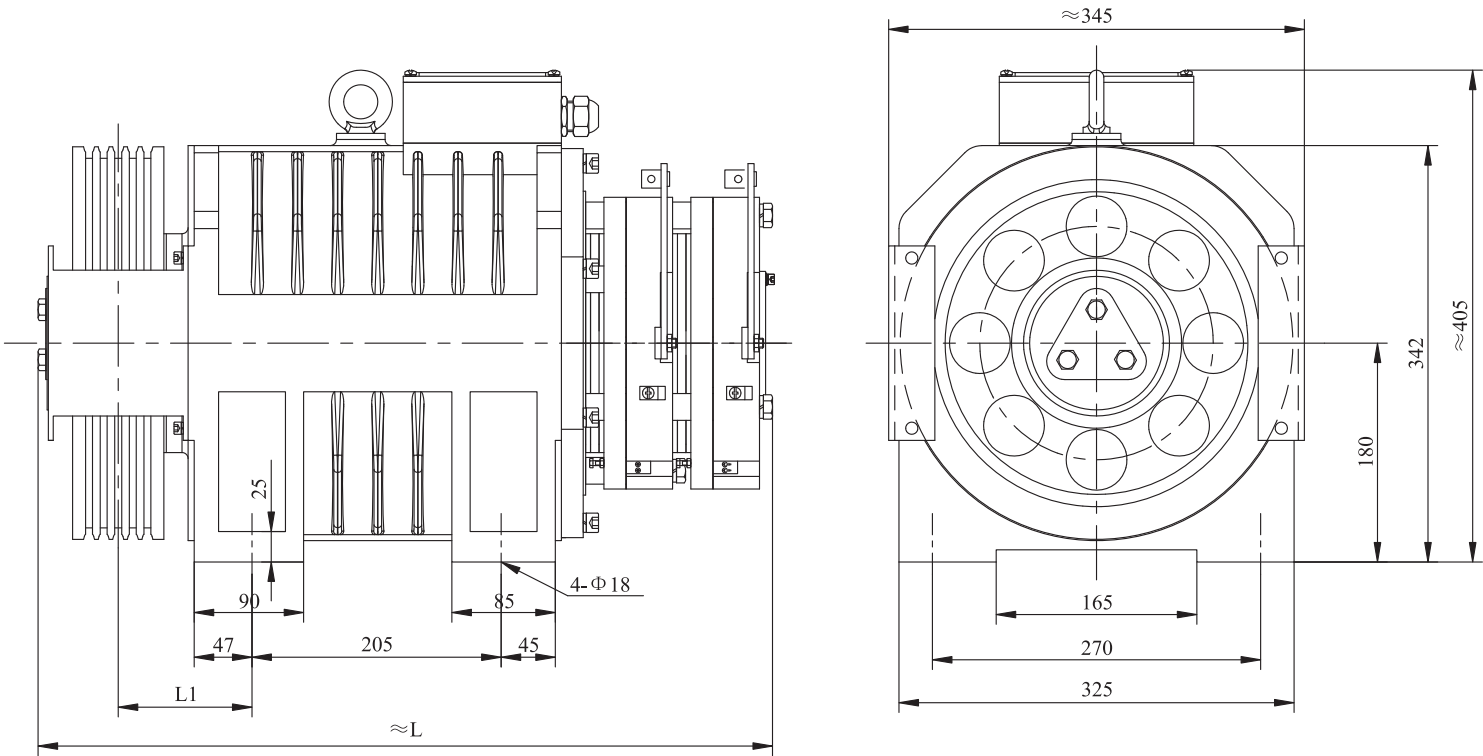

注


1.本机型可配备远程松闸装置并带4米松闸线。

Remark

The machine can be configured with the remote manual brake release with 4 meters wire.

CE  A3 — ER2D


Elevator Traction Machine
电梯曳引机

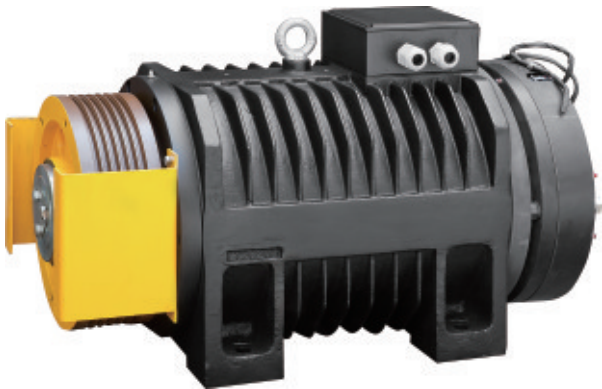

电源电压	Voltage:380V
悬挂比	Suspension:2:1
PZ1600B制动器	Brake:DC110V 1.2A
自重	Weight:355kg
最大静态载荷	Max. Static Load:3000kg

规格号 Spec	载 重 Load (kg)	梯 速 Lift Speed (m/s)	推荐高度 Height (m)	曳引轮直径 Sheave Diam (mm)	绳 轮 Rope sheave (mm)	额定电流 Current (A)	额定转矩 Torque (Nm)	额定转速 Rated Speed (rpm)	额定频率 Frequency (Hz)	功 率 Power (kW)	极 数 Pole	工作制 Rating	绝缘等级 INS.Class	防护等级 IP Code
ER2D-81P0B	800	1	≤80	Φ320	6 × Φ8 × 12	13.8	450	119	19.9	5.6	20	S5(40%)	F	IP41
ER2D-81P5B	800	1.5	≤80	Φ320	6 × Φ8 × 12	21.5	450	179	29.8	8.4	20	S5(40%)	F	IP41
ER2D-81P6B	800	1.6	≤80	Φ320	6 × Φ8 × 12	21.5	450	192	32	9	20	S5(40%)	F	IP41
ER2D-81P7B	800	1.75	≤80	Φ320	6 × Φ8 × 12	22.7	450	209	34.8	9.8	20	S5(40%)	F	IP41
ER2D-101P0B	1000	1	≤80	Φ320	7 × Φ8 × 12	17.2	550	119	19.9	6.9	20	S5(40%)	F	IP41
ER2D-101P5B	1000	1.5	≤80	Φ320	7 × Φ8 × 12	26.3	550	179	29.8	10.3	20	S5(40%)	F	IP41
ER2D-101P6B	1000	1.6	≤80	Φ320	7 × Φ8 × 12	26.3	550	192	32	11	20	S5(40%)	F	IP41
ER2D-101P7B	1000	1.75	≤80	Φ320	7 × Φ8 × 12	28.2	550	209	34.8	12	20	S5(40%)	F	IP41

CE  A3 — ER2D

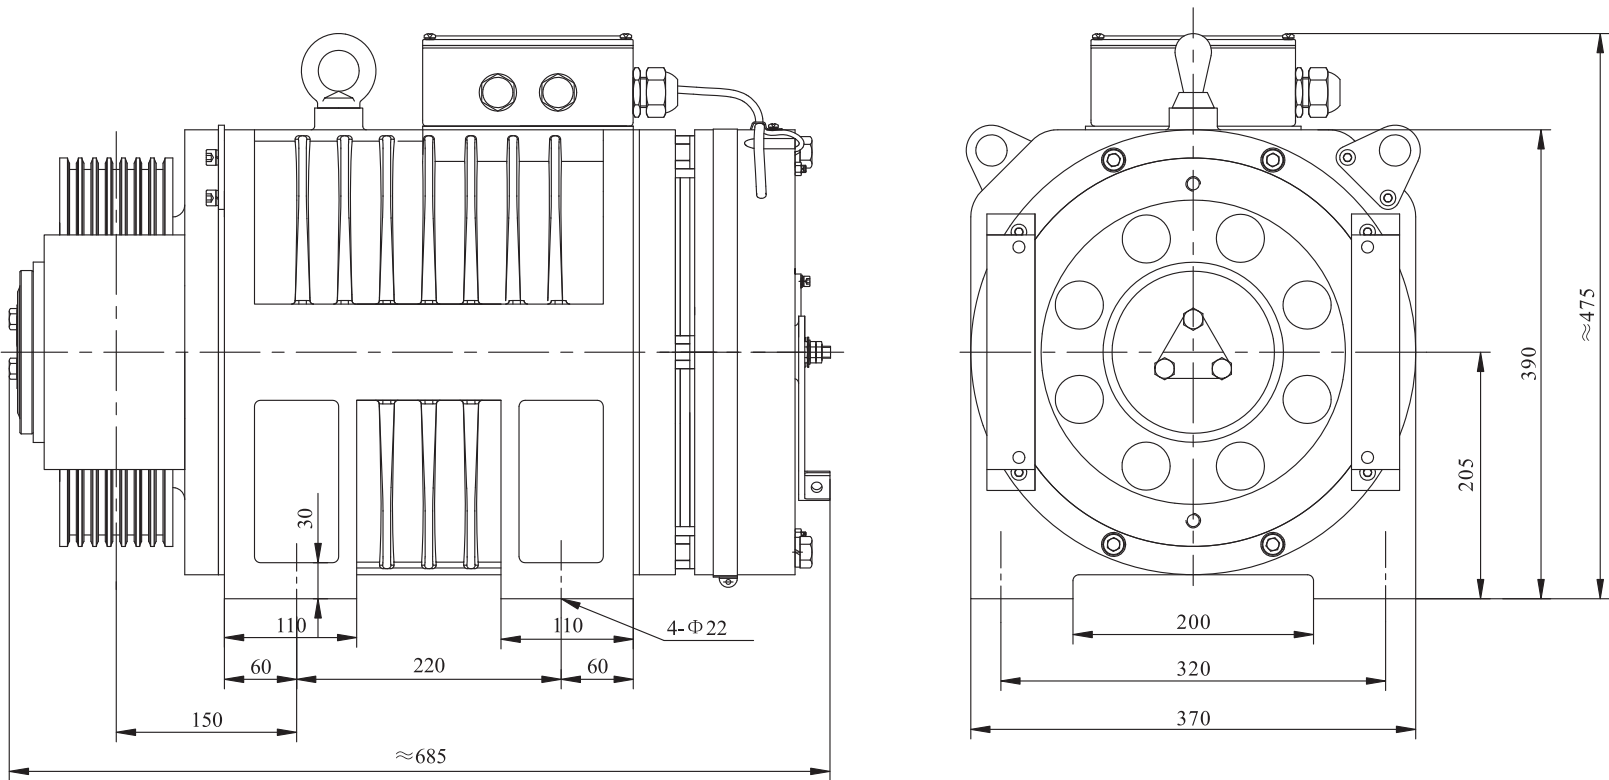

注


本机型可配备远程松闸装置并带4米松闸线。

Remark

The machine can be configured with the remote manual brake release with 4 meters wire.

CE A3—ER3D


Elevator Traction Machine
电梯曳引机

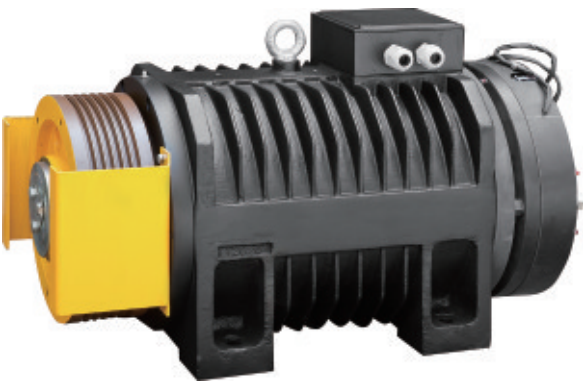

电源电压	Voltage:380V
悬挂比	Suspension:2:1
PZ1600B制动器	Brake:DC110V 1.2A
自重	Weight:420kg
最大静态载荷	Max. Static Load:3800kg

规格号 Spec	载 重 Load (kg)	梯 速 Lift Speed (m/s)	推荐高度 Height (m)	曳引轮直径 Sheave Diam (mm)	绳 轮 Rope sheave (mm)	额定电流 Current (A)	额定转矩 Torque (Nm)	额定转速 Rated Speed (rpm)	额定频率 Frequency (Hz)	功 率 Power (kW)	极 数 Pole	工作制 Rating	绝缘等级 INS.Class	防护等级 IP Code
ER3D-111P0B	1150	1	≤80	Φ320	8×Φ8×12	19.6	630	119	19.9	7.8	20	S5(40%)	F	IP41
ER3D-111P5B	1150	1.5	≤80	Φ320	8×Φ8×12	29.8	630	179	29.8	11.8	20	S5(40%)	F	IP41
ER3D-111P6B	1150	1.6	≤80	Φ320	8×Φ8×12	29.8	630	192	32	12.7	20	S5(40%)	F	IP41
ER3D-111P7B	1150	1.75	≤80	Φ320	8×Φ8×12	32.3	630	209	34.8	13.8	20	S5(40%)	F	IP41
ER3D-121P0B	1250	1	≤80	Φ320	8×Φ8×12	21.1	680	119	19.9	8.5	20	S5(40%)	F	IP41
ER3D-121P5B	1250	1.5	≤80	Φ320	8×Φ8×12	32.1	680	179	29.8	12.7	20	S5(40%)	F	IP41
ER3D-121P6B	1250	1.6	≤80	Φ320	8×Φ8×12	32.1	680	192	32	13.8	20	S5(40%)	F	IP41
ER3D-121P7B	1250	1.75	≤80	Φ320	8×Φ8×12	34.8	680	209	34.8	14.9	20	S5(40%)	F	IP41

CE A3—ER3D

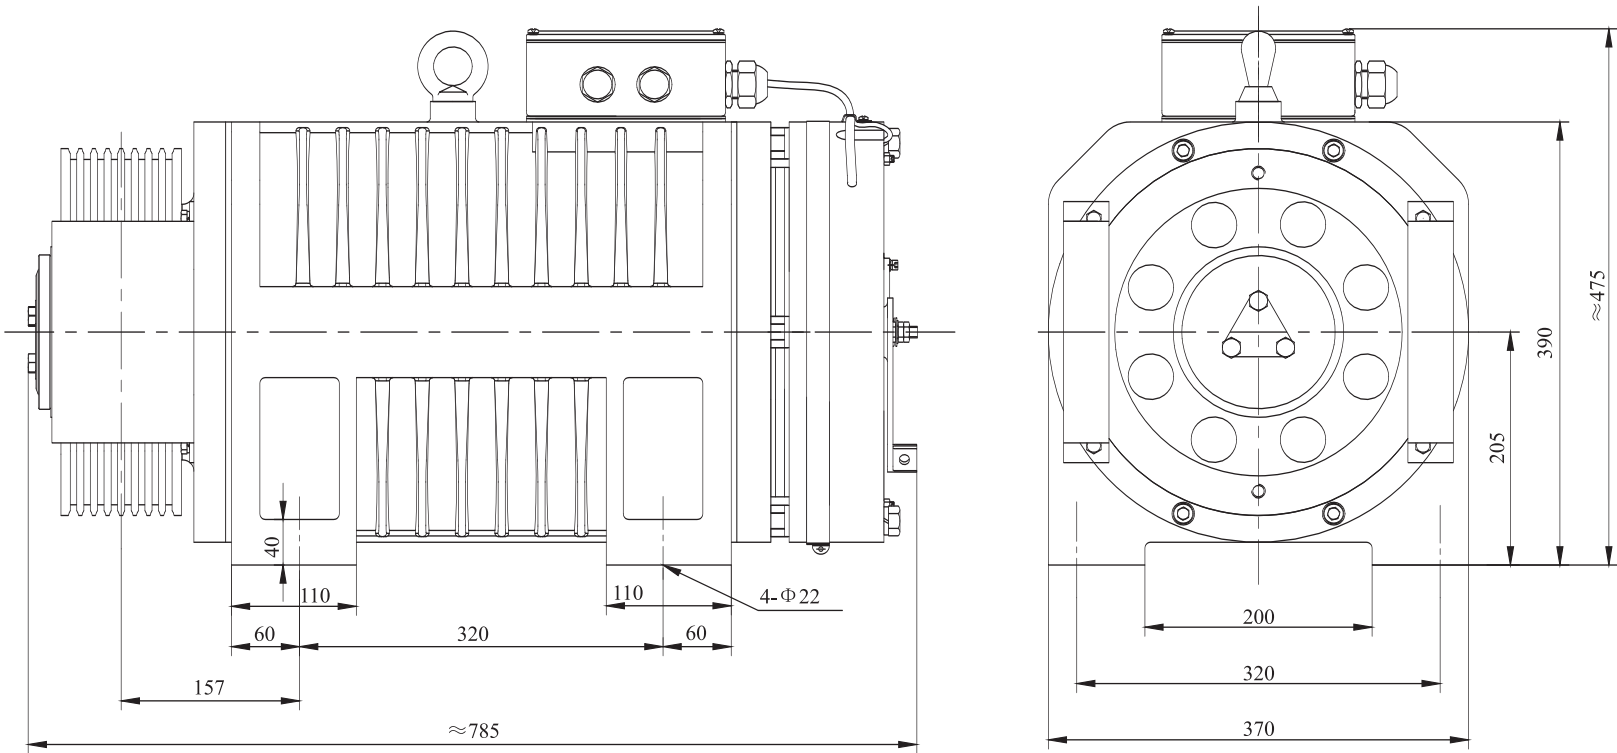

注
本机型可配备远程松闸装置并带4米松闸线。

Remark
The machine can be configured with the remote manual brake release with 4 meters wire.

CE A3—ER3




Elevator Traction Machine
电梯曳引机

电源电压	Voltage:380V
悬挂比	Suspension:2:1
SPZ800B制动器	Brake:DC110V 2*1.5A
自重	Weight:455kg
最大静态载荷	Max. Static Load:4500kg

规格号 Spec	载 重 Load (kg)	梯 速 Lift Speed (m/s)	推荐高度 Height (m)	曳引轮直径 Sheave Diam (mm)	绳 轮 Rope sheave (mm)	额定电流 Current (A)	额定转矩 Torque (Nm)	额定转速 Rated Speed (rpm)	额定频率 Frequency (Hz)	功 率 Power (kW)	极 数 Pole	工作制 Rating	绝缘等级 INS.Class	防护等级 IP Code
ER3-131P0B	1350	1	≤80	Φ320	9×Φ8×12	22.8	735	119	19.9	9.2	20	S5(40%)	F	IP41
ER3-131P5B	1350	1.5	≤80	Φ320	9×Φ8×12	33	735	179	29.8	13.8	20	S5(40%)	F	IP41
ER3-131P6B	1350	1.6	≤80	Φ320	9×Φ8×12	33	735	192	32	14.8	20	S5(40%)	F	IP41
ER3-131P7B	1350	1.75	≤80	Φ320	9×Φ8×12	36.8	735	209	34.8	16.1	20	S5(40%)	F	IP41
ER3-161P0B	1600	1	≤80	Φ320	10×Φ8×12	27	870	119	19.9	10.8	20	S5(40%)	F	IP41
ER3-161P5B	1600	1.5	≤80	Φ320	10×Φ8×12	39	870	179	29.8	16.3	20	S5(40%)	F	IP41
ER3-161P6B	1600	1.6	≤80	Φ320	10×Φ8×12	39	870	192	32	17.5	20	S5(40%)	F	IP41
ER3-161P7B	1600	1.75	≤80	Φ320	10×Φ8×12	43.5	870	209	34.8	19	20	S5(40%)	F	IP41

CE A3—ER3

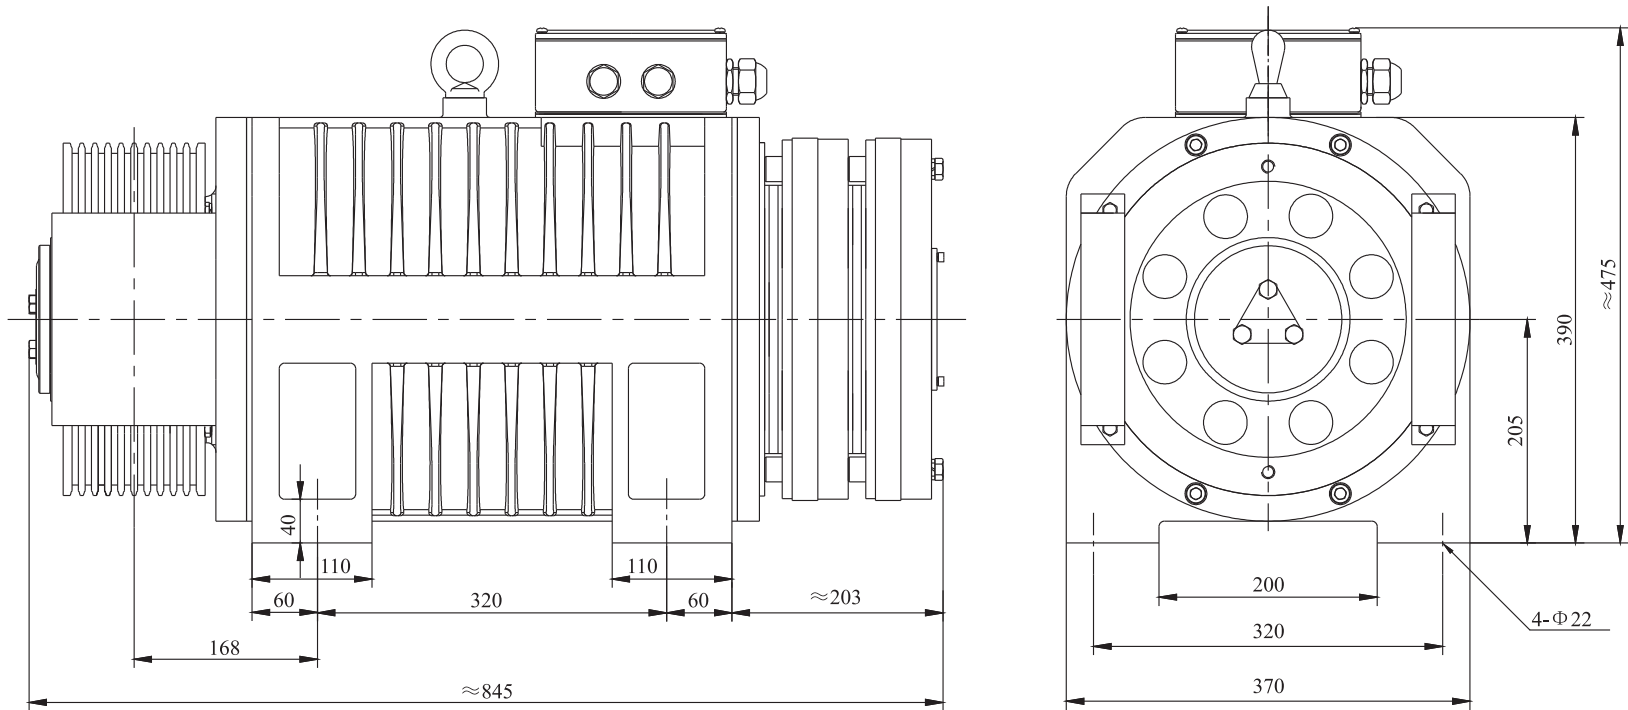

注

本机型无手动松闸装置，客户需自配电动松闸。

Remark

This machine without manual brake release, customers with electric brake release.

CE A3—ER6D





Elevator Traction Machine
电梯曳引机

电源电压	Voltage:380V
悬挂比	Suspension:2:1
SPZ1600制动器	Brake:DC110V 2*2.1A
自重	Weight:880kg
最大静态载荷	Max. Static Load:6000kg

规格号 Spec	载 重 Load (kg)	梯 速 Lift Speed (m/s)	推荐高度 Height (m)	曳引轮直径 Sheave Diam (mm)	绳 轮 Rope sheave (mm)	额定电流 Current (A)	额定转矩 Torque (Nm)	额定转速 Rated Speed (rpm)	额定频率 Frequency (Hz)	功 率 Power (kW)	极 数 Pole	工作制 Rating	绝缘等级 INS.Class	防护等级 IP Code
ER6D-121P0	1250	1	≤120	Φ440	7×Φ10×16	20.2	860	87	14.5	7.8	20	S5(40%)	F	IP41
ER6D-121P6	1250	1.6	≤120	Φ440	7×Φ10×16	30.6	860	139	23.2	12.6	20	S5(40%)	F	IP41
ER6D-121P7	1250	1.75	≤120	Φ440	7×Φ10×16	33	860	153	25.5	13.8	20	S5(40%)	F	IP41
ER6D-122P0	1250	2	≤120	Φ440	7×Φ10×16	36.8	860	174	29	15.7	20	S5(40%)	F	IP41
ER6D-131P0	1350	1	≤120	Φ440	7×Φ10×16	21.8	920	87	14.5	8.4	20	S5(40%)	F	IP41
ER6D-131P6	1350	1.6	≤120	Φ440	7×Φ10×16	33.1	920	139	23.2	13.4	20	S5(40%)	F	IP41
ER6D-131P7	1350	1.75	≤120	Φ440	7×Φ10×16	35.5	920	153	25.5	14.8	20	S5(40%)	F	IP41
ER6D-132P0	1350	2	≤120	Φ440	7×Φ10×16	39.8	920	174	29	16.8	20	S5(40%)	F	IP41
ER6D-161P0	1600	1	≤120	Φ440	8×Φ10×16	26.3	1120	87	14.5	10.2	20	S5(40%)	F	IP41
ER6D-161P6	1600	1.6	≤120	Φ440	8×Φ10×16	39.8	1120	139	23.2	16.3	20	S5(40%)	F	IP41
ER6D-161P7	1600	1.75	≤120	Φ440	8×Φ10×16	42.9	1120	153	25.5	17.9	20	S5(40%)	F	IP41
ER6D-162P0	1600	2	≤120	Φ440	8×Φ10×16	47.9	1120	174	29	20.5	20	S5(40%)	F	IP41
ER6D-221P0	2250	1	≤120	Φ440	8×Φ10×16	36.2	1530	87	14.5	13.9	20	S5(40%)	F	IP41
ER6D-221P6	2250	1.6	≤120	Φ440	8×Φ10×16	53.7	1530	139	23.2	22.3	20	S5(40%)	F	IP41
ER6D-221P7	2250	1.75	≤120	Φ440	8×Φ10×16	59.5	1530	153	25.5	24.5	20	S5(40%)	F	IP41
ER6D-222P0	2250	2	≤120	Φ440	8×Φ10×16	66.7	1530	174	29	27.9	20	S5(40%)	F	IP41

CE A3—ER6D

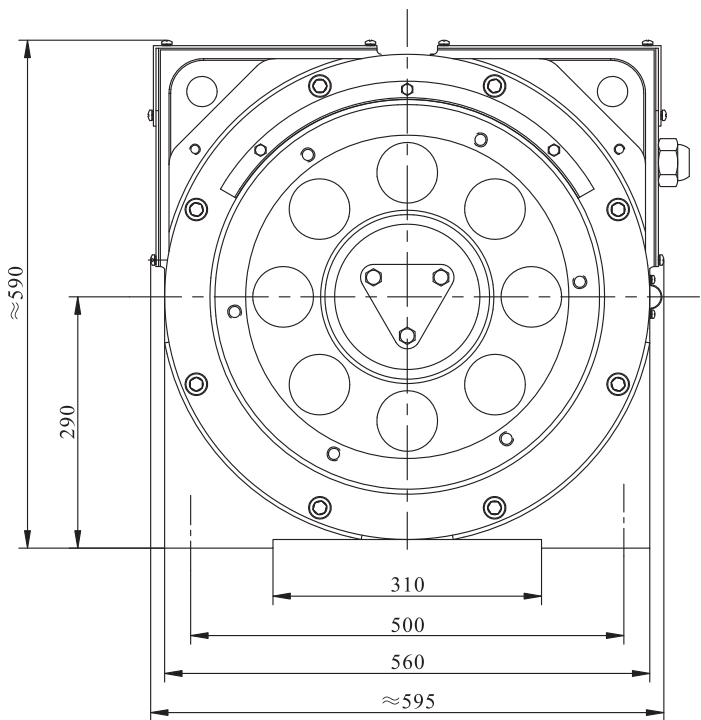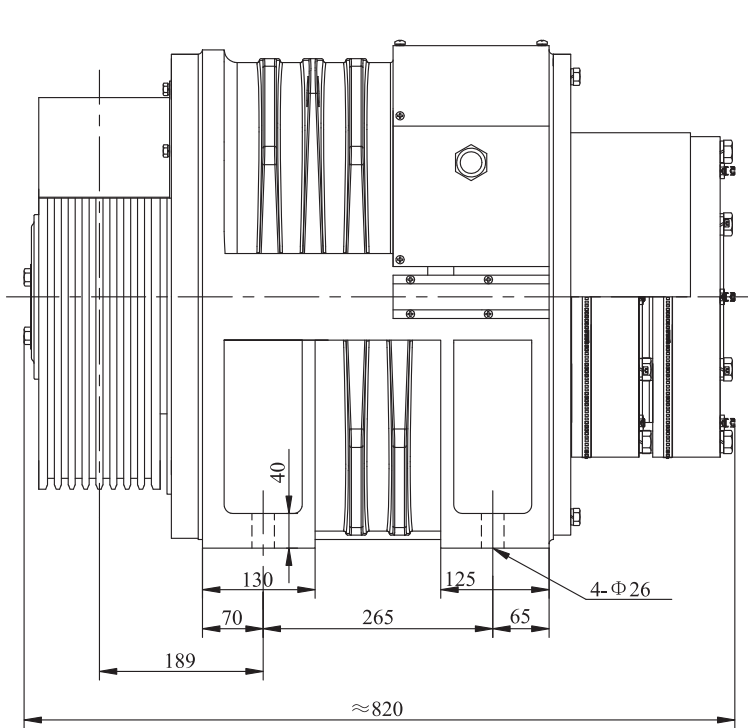

注

本机型无手动松闸装置，客户需自配电动松闸。

Remark

This machine without manual brake release, customers with electric brake release.

PERMANENT MAGNET SYNCHRONOUS
GEARLESS TRACTION MACHINE

GTN

SERIES

PERMANENT MAGNET SYNCHRONOUS
GEARLESS TRACTION MACHINE



Recommendation Form (GTN SERIES)

推荐表 (GTN 系列)

曳引比	Traction Ratio	梯速 Lift Speed(m/s)					
额定载重	Load(kg)	2.5	3.0	4.0	5.0	6.0	7.0
1000			GTNH2(2:1)				
1250							
1350							
1600		GTNH2(2:1)			GTN3(1:1)		
2000							

CE A3 — GTNH2





Elevator Traction Machine
电梯曳引机

电源电压	Voltage:380V
悬挂比	Suspension:2:1
PZD140制动器	Brake:DC110V 4*0.69A
自重	Weight:1120kg
最大静态载荷	Max. Static Load:14000kg

规格号 Spec	载 重 Load (kg)	梯 速 Lift Speed (m/s)	推荐高度 Height (m)	曳引轮直径 Sheave Diam (mm)	绳 轮 Rope sheave (mm)	额定电流 Current (A)	额定转矩 Torque (Nm)	额定转速 Rated Speed (rpm)	额定频率 Frequency (Hz)	功 率 Power (kW)	复绕 Double Roping	极数 Pole	工作制 Rating	绝缘等级 INS.Class	防护等级 IP Code
GTNH2-103P0	1000	3	≤150	Φ560	10xΦ13x18	42.8	955	205	34.2	20.5	YES	20	S5(50%)	F	IP21
GTNH2-104P0	1000	4	≤150	Φ560	10xΦ13x18	56.6	955	273	45.5	27.3	YES	20	S5(50%)	F	IP21
GTNH2-123P0	1250	3	≤150	Φ560	10xΦ13x18	53.3	1190	205	34.2	25.5	YES	20	S5(50%)	F	IP21
GTNH2-124P0	1250	4	≤150	Φ560	10xΦ13x18	72	1190	273	45.5	34	YES	20	S5(50%)	F	IP21
GTNH2-133P0	1350	3	≤150	Φ560	10xΦ13x18	57.2	1290	205	34.2	27.7	YES	20	S5(50%)	F	IP21
GTNH2-134P0	1350	4	≤150	Φ560	10xΦ13x18	75.5	1290	273	45.5	36.9	YES	20	S5(50%)	F	IP21
GTNH2-162P5	1600	2.5	≤150	Φ560	12 × Φ 13 × 18	56.5	1525	171	28.5	27.3	YES	20	S5(50%)	F	IP21
GTNH2-163P0	1600	3	≤150	Φ560	12 × Φ 13 × 18	69.5	1525	205	34.2	32.7	YES	20	S5(50%)	F	IP21
GTNH2-164P0	1600	4	≤150	Φ560	12 × Φ 13 × 18	93	1525	273	45.5	43.6	YES	20	S5(50%)	F	IP21
GTNH2-202P5	2000	2.5	≤150	Φ560	12 × Φ 13 × 18	72	1910	171	28.5	34.2	YES	20	S5(50%)	F	IP21
GTNH2-203P0	2000	3	≤150	Φ560	12 × Φ 13 × 18	90	1910	205	34.2	41	YES	20	S5(50%)	F	IP21
GTNH2-204P0	2000	4	≤150	Φ560	12 × Φ 13 × 18	120	1910	273	45.5	54.3	YES	20	S5(50%)	F	IP21

CE A3 — GTNH2

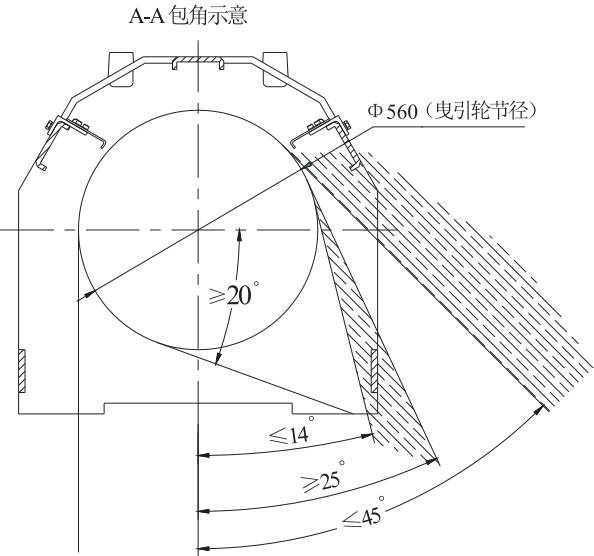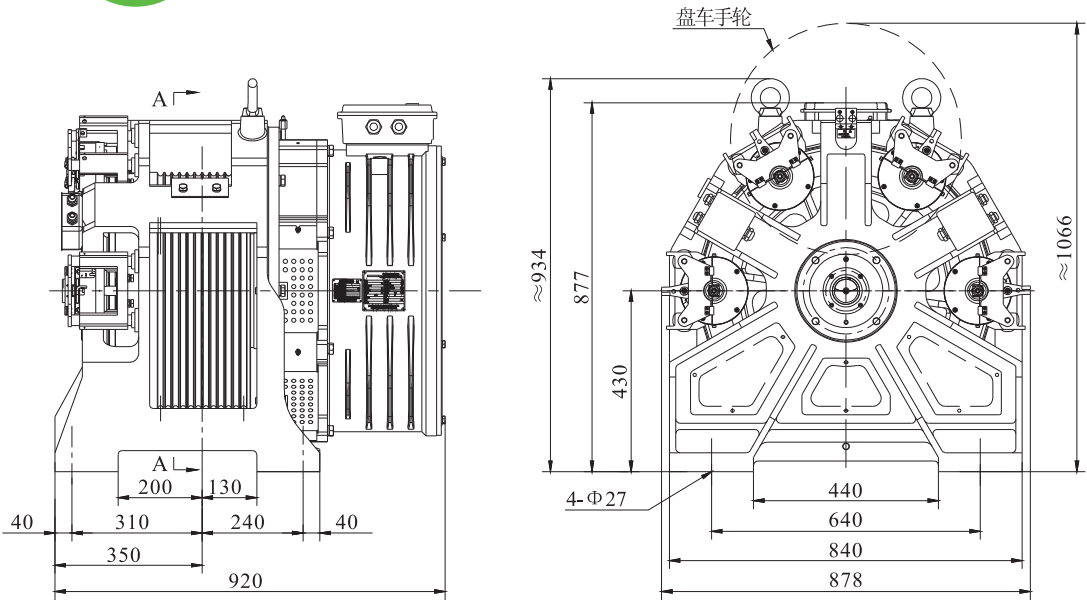

注：钢丝绳绕出角度按上图所示范围，避开阴影部分

注
本机型可选配盘车装置。

Remark
This machine can be configured with the manual wheel.

CE — GTN3




Elevator Traction Machine
电梯曳引机

电源电压	Voltage:380V
悬挂比	Suspension:1:1
PZD360制动器	Brake:DC110V 2*2.2A
自重	Weight:3000kg
最大静态载荷	Max. Static Load:36000kg

规格号 Spec	载 重 Load (kg)	梯 速 Lift Speed (m/s)	推荐高度 Height (m)	曳引轮直径 Sheave Diam (mm)	绳 轮 Rope sheave (mm)	额定电流 Current (A)	额定转矩 Torque (Nm)	额定转速 Rated Speed (rpm)	额定频率 Frequency (Hz)	功 率 Power (kW)	复绕 Double Roping	支撑 Outside Support	极数 Pole	工作制 Rating	绝缘等级 INS.Class	防护等级 IP Code
GTN3-165P0-1	1600	5	≤300	Φ700	14×Φ16×20	123	3750	137	27.4	53.9	YES	YES	24	S5(60%)	F	IP41
GTN3-166P0-1	1600	6	≤300	Φ700	14×Φ16×20	141	3750	164	32.8	64.6	YES	YES	24	S5(60%)	F	IP41
GTN3-167P0-1	1600	7	≤300	Φ700	14×Φ16×20	165	3750	192	38.4	75.4	YES	YES	24	S5(60%)	F	IP41
GTN3-205P0-1	2000	5	≤300	Φ700	16×Φ16×20	147	4700	137	27.4	67.2	YES	YES	24	S5(60%)	F	IP41
GTN3-206P0-1	2000	6	≤300	Φ700	16×Φ16×20	174	4700	164	32.8	80.6	YES	YES	24	S5(60%)	F	IP41
GTN3-207P0-1	2000	7	≤300	Φ700	16×Φ16×20	213	4700	192	38.4	94	YES	YES	24	S5(60%)	F	IP41

CE — GTN3

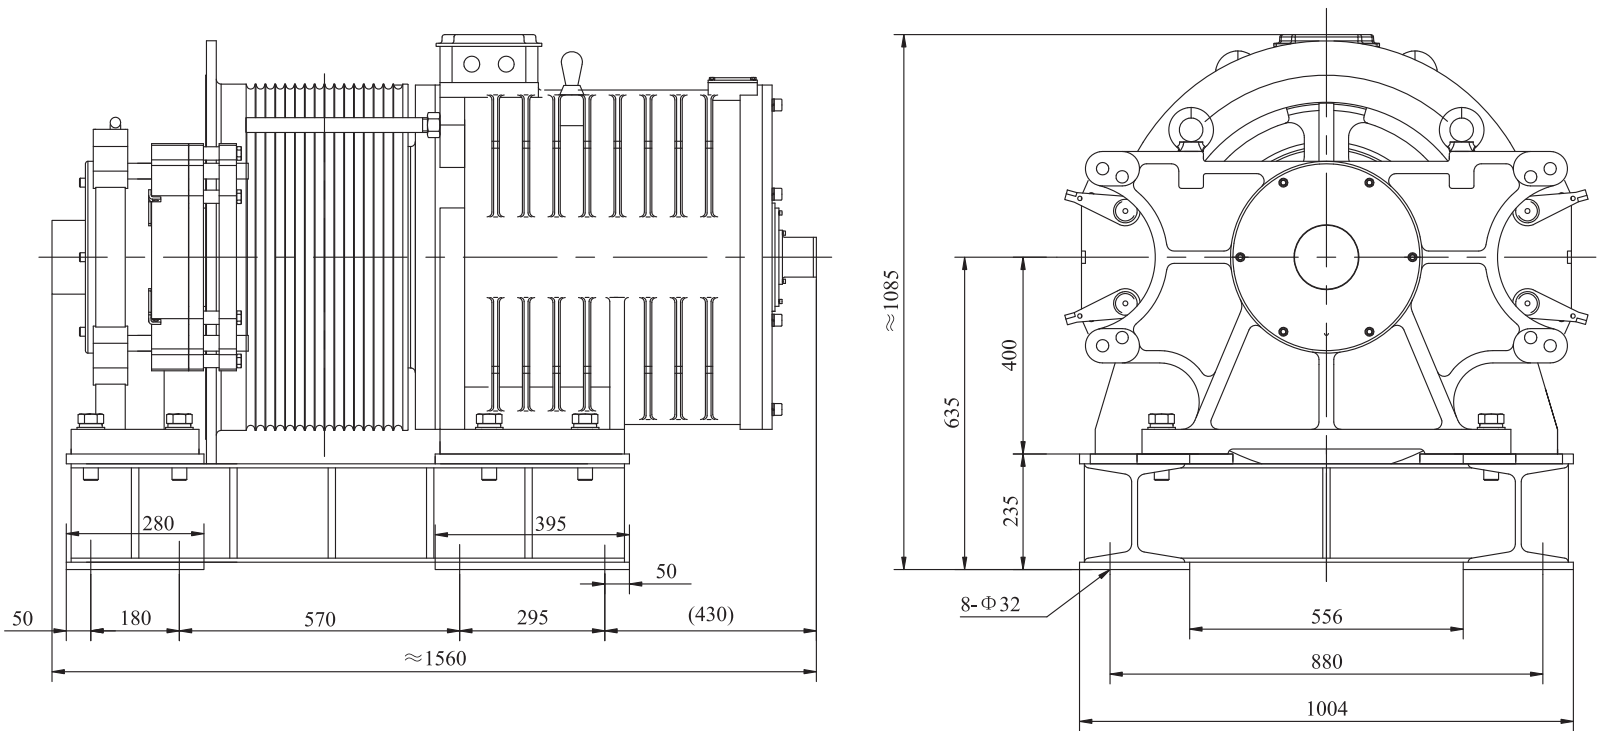

注

- 1. 本机型无盘车装置。
- 2. 本机型无远程松闸装置。

Remark

The machine can't be configured with the handwheel.
The machine can't be configured with the remote manual brake release.



For Home Lift 适用于家庭梯

CE A3—VM450





Elevator Traction Machine
家庭用电梯曳引机

电源电压	Voltage:380V or 220V
悬挂比	Suspension:2:1
PZ300B制动器	Brake:DC110V 1.6A
自重	Weight:105kg
最大静态载荷	Max. Static Load:1300kg

规格号 Spec	载 重 Load (kg)	梯 速 Lift Speed (m/s)	曳引轮直径 Sheave Diam (mm)	绳 轮 Rope sheave (mm)	额定电流 Current (A)	额定转矩 Torque (Nm)	额定转速 Rated Speed (rpm)	额定频率 Frequency (Hz)	功 率 Power (kW)	极 数 Pole	工作制 Rating	绝缘等级 INS.Class	防护等级 IP Code
VM450-30P4A	320	0.4	Φ200	3 × Φ8 × 12	2.5	100	76	12.7	0.8	20	S5 25%	F	IP41
VM450-30P4A(220)	320	0.4	Φ200	3 × Φ8 × 12	4.7	100	76	12.7	0.8	20	S5 25%	F	IP41
VM450-40P4A	450	0.4	Φ200	4 × Φ8 × 12	3.5	138	76	12.7	1.1	20	S5 25%	F	IP41
VM450-40P4A(220)	450	0.4	Φ200	4 × Φ8 × 12	6.5	138	76	12.7	1.1	20	S5 25%	F	IP41

CE A3—VM450

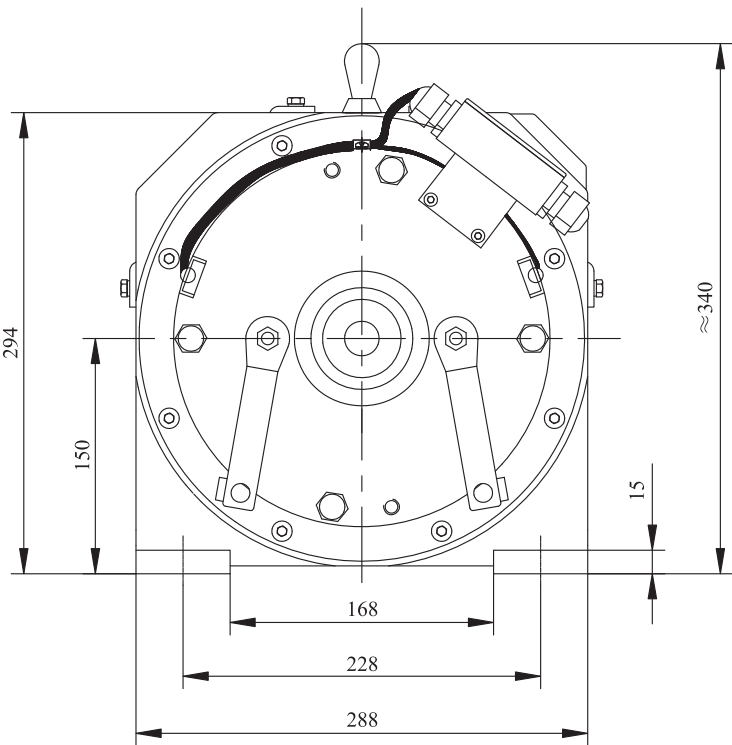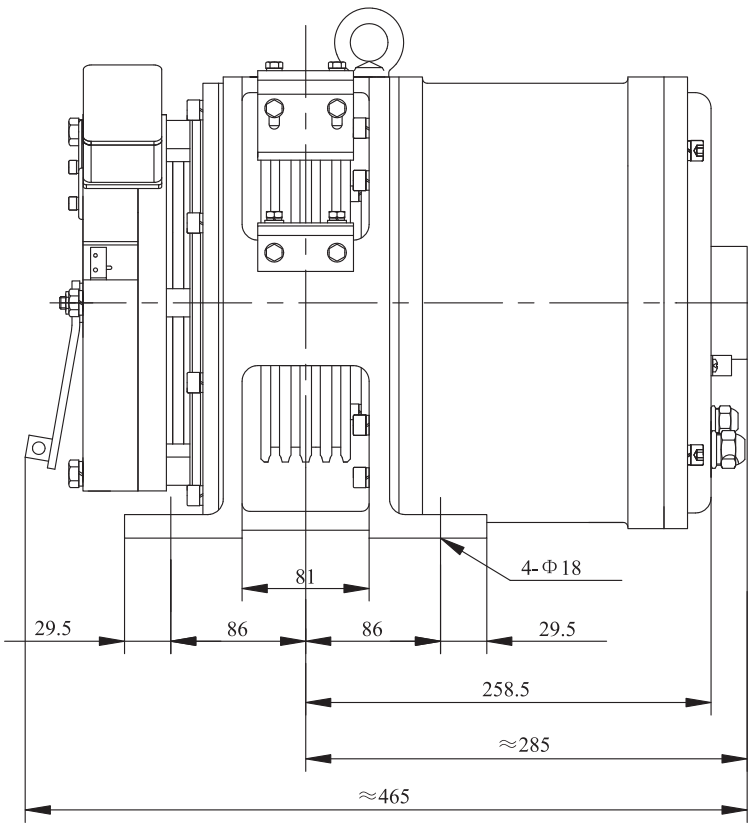

注

本机型可配备远程松闸装置并带4米松闸线。

Remark

The machine can be configured with the remote manual brake release with 4 meters wire.